

GLACIER MASS BALANCE MEASUREMENTS

A MANUAL FOR FIELD WORK

by

G. Østrem and A. Stanley

A guide to field officers and assistants
with limited background in Glaciology

DEPARTMENT OF ENERGY, MINES AND RESOURCES

Glaciology Section

Ottawa, Canada, 1966

GLACIER MASS BALANCE MEASUREMENTS

A MANUAL FOR FIELD WORK

by

G. Østrem and A. Stanley

**A guide to field officers and assistants
with limited background in Glaciology**

DEPARTMENT OF ENERGY, MINES AND RESOURCES

Glaciology Section

Ottawa, Canada, 1966

GLACIER MASS BALANCE MEASUREMENTS

A MANUAL FOR FIELD WORK

FOREWORD

During the International Hydrological Decade it is anticipated that glaciological data will be collected at numerous glaciers. In order that these data can be compared directly it is essential that they are collected in a consistent manner and that the results presented in a standardized form. Field procedures followed at the Department of Mines and Technical Surveys in Canada are described in this manual. They were made in order to ensure, as far as possible, uniform accuracy and to obtain results that can be directly comparable.

The manual:

1. describes standard field techniques
2. outlines practical difficulties and indicates how to overcome them
3. gives some hints of practical use for the field work
4. suggests how the data can be recorded and tabulated
5. shows a suitable form for summary of data to be made in the field
6. describes the construction of an A-frame hut

Most of the detailed instructions are directly concerned with the Canadian glaciological program which started during 1965 in southern British Columbia and Alberta, but they could probably be used for similar field programs elsewhere - with minor adjustments in each particular case.

Final revisions in the text were made at a Field Seminar at South Cascade Glacier, March 1966, in close cooperation with glaciologists of the Water Resources Division in Tacoma, Washington.

Ottawa, March 1966
Gunnar Østrem, Alan Stanley

LIST OF CONTENTS

	Page
SELECTION OF SUITABLE GLACIERS	1
BRIEF DESCRIPTION OF GLACIOLOGICAL PROGRAM IN WESTERN CANADA	2
STAKE NETS	5
1. Stake location	6
2. Numbering system	6
3. Replacement of missing stakes	6
4. Duplication of stakes	8
5. Stake extension	9
6. Technique of inserting stakes	9
ACCUMULATION MEASUREMENTS	15
1. General	15
2. Snow depth soundings	16
3. Pit studies	18
4. Density determinations performed from the snow surface	22
a. The coring drill	22
b. A radioactive method	23
5. Additional accumulation	23
6. Recording data and completion of forms	24
a. The snow pit form	25
b. The coring drill form	29
ABLATION MEASUREMENTS	
1. General	30
2. Stake readings	31
a. For stakes drilled into ice	32
b. For stakes drilled in ice which is still covered by snow	32
c. For stakes in the firn area	33
d. Special stake chains or wires inserted in a hot point drill hole	33
3. Completing stake forms	34
4. Pit studies at the end of ablation season	37
PLOTTING AND CONTOURING	
1. General	38
2. Ambiguities	40
3. Use of colours on manuscript maps	40

METEOROLOGICAL OBSERVATIONS	42
1. General	42
2. Air temperature measurements	43
3. Cloud cover	43
4. Precipitation	43
5. Wind direction and speed	44
6. Field processing of meteorological data	44
WATER DISCHARGE MEASUREMENTS	45
1. General	45
2. Stream gauges	46
3. Number of readings	48
4. 24-hour periods	49
5. Preliminary processing of results	49
6. Calculation of water volume	50
MEASUREMENTS OF SUSPENDED MATERIAL	51
1. General	51
2. Location of sampling site	51
3. Sampling method	51
4. Filtering	52
5. Numbering of samples	53
SURVEYING - HINTS FOR FIELD CREW	53
1. General	53
2. Selecting fixed points	54
3. Marking fixed points	54
4. Marking points on the glacier	55
a. On glacier ice	55
b. In the accumulation area	55
5. Supplementary ground control	56
ERECTING AN A-FRAME HUT	56
1. General	56
2. Basic construction	57
3. Foundation	57
4. The framework	59
5. Roof and end walls	61
6. The floor	63
7. Door and window	63
8. Outside cover, paint, etc.	68
9. Guy wires	68
10. Materials necessary for one complete hut	70

DUTIES AT THE END OF THE SUMMER FIELD SEASON	71
1. General	71
2. List of data sheets and summaries	71
3. Closing the station	72
APPENDIX	74
a. Sample collection of the most important standard forms to be used in the field work	74
b. Short description of ashing procedure for the laboratory processing of silt samples.	74
REFERENCES AND RECOMMENDED LITERATURE	76
SOME STATISTICAL CONSIDERATIONS	79

SELECTION OF SUITABLE GLACIERS

It is not physically possible to examine all glaciers in a mountain system or within the catchment area of large streams. Therefore, it will be necessary to select one or more glaciers which are considered representative of the whole area under study. However, the results obtained from one or more glaciers can probably be applied to a large glacierized area. It is therefore extremely important that the choice of the representative basin be made very carefully, but practical conditions (mainly accessibility) might influence the choice of glaciers for this kind of study. It is therefore probably necessary to make a compromise in most studies.

A suitable glacier representing each geographical area, climatic zone or catchment area should be selected on the basis of the following considerations:

- a) The glacier must have a well-defined catchment area and the degree of glacierization must be as high as possible so that the melt water stream depicts conditions on the glacier rather than conditions on the surrounding terrain.
- b) The size of glacier should be comparable with all glaciers in the area of study but small enough to be fully examined by a 2-3 man party. (The upper limit of such an area is probably 10-15 km²). In special cases, when great economic interests are involved it might be possible to have more people involved in the field measurements and thus a larger glacier area could be examined.
- c) The range in altitude between the glacier tongue and the upper firn area should be as large as possible, or at least cover the main part of the range for the glaciers in the area under study.
- d) The glacier should be drained by one single melt water stream with local conditions favourable for discharge measurements close to the glacier snout.
- e) The glacier should have relatively easy access so that it will be feasible to visit it throughout the year without extensive use of helicopters etc. Easy access should, however, not be over-emphasized; an ideal glacier should not be omitted and replaced by another less suitable for reason of accessibility alone. This question, however, must be decided for each particular glacier depending on available resources.
- f) The glacier should have few crevasses as they make the work unnecessarily risky for observers and may restrict proper observations to only a small area. However, if a representative glacier within an area has a great number of crevasses the value of this point must also be considered in each particular case.

- g) The glacier should be situated in an area for which reliable maps and good air photographs are available or can be readily obtainable shortly after investigations have started. All accumulation and ablation measurements must be plotted on maps, and the scale of 1:10,000 is generally most suitable for this purpose. A contour interval of 10 metres will be appropriate for the glacier surface, 50 m will be sufficient for the surrounding area. The map must cover the entire catchment area above the site of river observations.

BRIEF DESCRIPTION OF THE GLACIOLOGICAL PROGRAM IN WESTERN CANADA

As a part of Canada's contribution to the International Hydrological Decade glaciological studies will be conducted at a number of glaciers. These studies will include measurements of mass balance, meteorological observations on or near the glacier, measurements of discharge and silt content in outflow streams. Besides these subjects which are within the scope of the International Hydrological Decade program, studies of the ice movement (i. e. "ice discharge" in a glacierized valley), ice formation in the firn area, ice crystallography and related problems will be carried out. In some cases however the limited sources of trained personnel will restrict studies to the first mentioned subjects.

The primary purposes of the glaciological investigations on the selected glaciers will be:


1. To determine the mass balance on the glaciers. The winter accumulation will be measured as accurately as possible and the total amount of ablation during the summer season will be observed by a network of stakes drilled into the ice. Variations in snow density in the firn area will be observed by pit studies throughout the ablation season.
2. To study the accumulation pattern and, if possible, follow its variation throughout the accumulation season. Furthermore, to make a comparison between the total accumulation on the glacier up to certain dates during the winter and the precipitation records kept by meteorological stations and snow courses in the area.
3. To study the ablation throughout the summer and correlate variations with meteorological parameters obtained at the glacier and/or deduced from observations at distant meteorological stations.

4. To measure the glacier stream discharge continuously throughout the summer in order to check calculations of ablation in selected periods. Discharge observations will be corrected for rainfall in the catchment area determined with rain gauges placed at a number of locations.
5. To take water samples from the glacier stream for determination of sediment transport. At the end of the Decade, this will give some information about the effects of glacier erosion and any sedimentation which can be expected in natural or artificial reservoirs. Ideally some supplementary observations should be made downstream, close to these reservoirs.
6. To investigate refreezing of melt water in snow and firn. Refreezing is very pronounced on cold glaciers in the Arctic but the process has not been fully investigated for Alpine glaciers.

In order to compare results obtained from glaciers in different climatic areas, a number of glaciers have been selected across the Canadian Cordillera. The glaciers were selected close to a line running from the Coast Mountains north of Vancouver, B. C., to the eastern flank of the Rocky Mountains north of Banff, Alberta. The selection was made to include humid coastal areas and the dry eastern mountain slopes. Furthermore, a fairly dense network of meteorological stations exists in this part of Canada and there is a good transportation system so that most of the glaciers are fairly accessible. To date, five glaciers have been selected:

- a) Ram River Glacier at the northeastern border of Banff National Park, Alberta.
- b) Peyto Glacier at the provincial boundary close to the Banff-Jasper Highway in Banff National Park, Alberta.
- c) Woolsey Glacier, part of the Clachnacudainn Snowfield in Revelstoke National Park, B. C.
- d) Place Glacier 20 km northeast of Pemberton, B. C.
- e) Sentinel Glacier in Garibaldi Provincial Park, B. C.

The selection of glaciers will be extended later to include a glacier in an extremely humid area either on Vancouver Island or on the mainland north of Vancouver Island, and a glacier between Woolsey and Peyto.

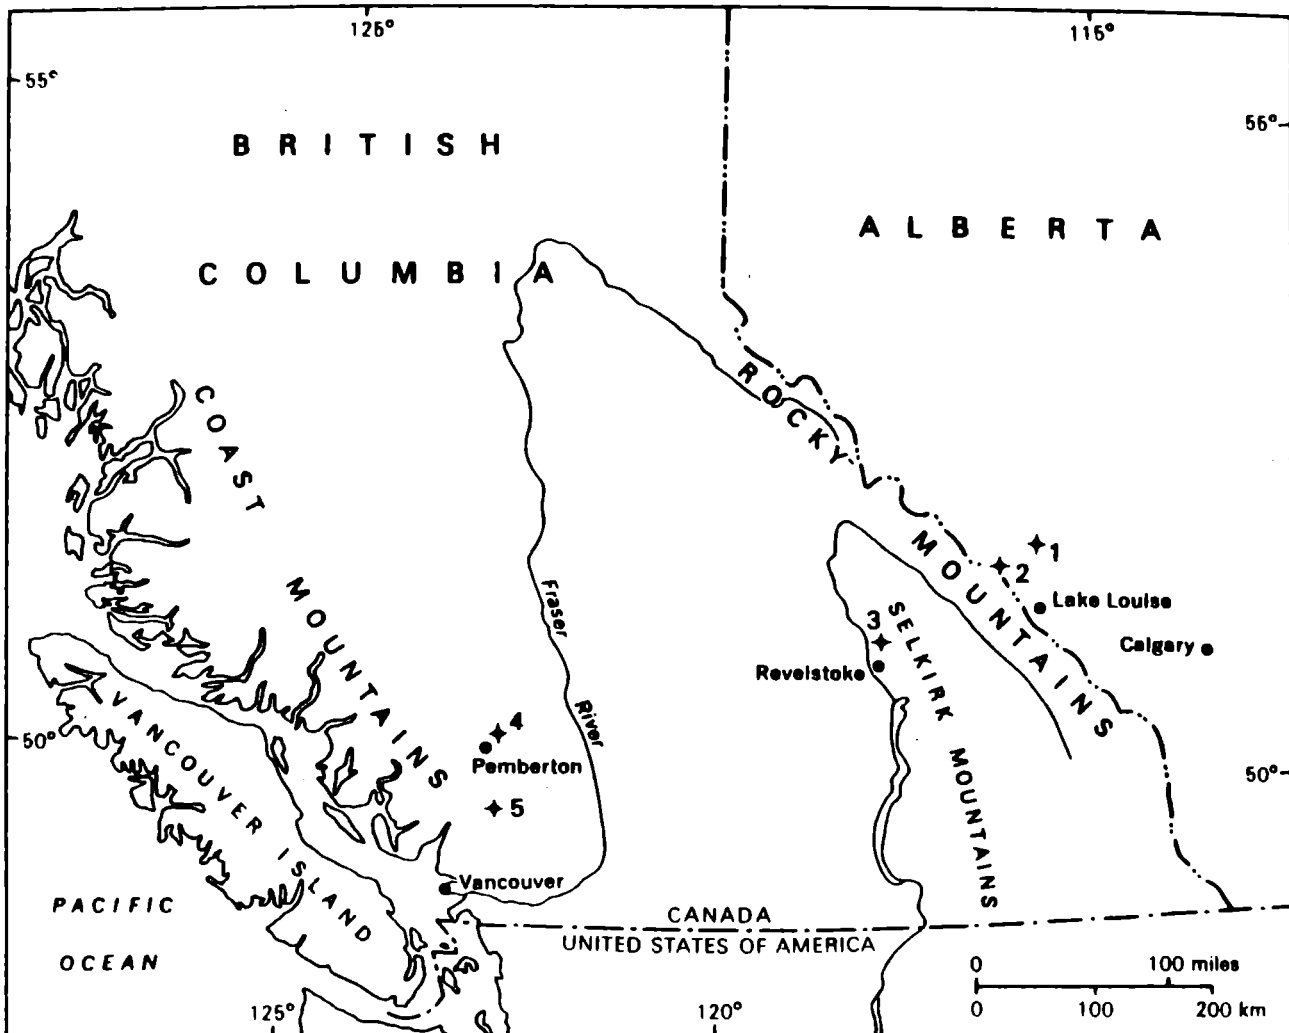

Location map showing the Canadian glaciers selected for mass balance studies during 1965.

- (1) Ram River Glacier, one of the easternmost glaciers in the Rocky Mountains.
- (2) Peyto Glacier in Banff National Park.
- (3) Woolsey Glacier in Revelstoke National Park.
- (4) Place Glacier in the Pemberton area.
- (5) Sentinel Glacier in Garibaldi Provincial Park.

Measurements will be continued for a period of at least ten years. Accumulation will be measured at the end of the accumulation season (in April or May), but in addition, it will be necessary to make winter visits to glaciers in areas of heavy accumulation to extend the main stakes in the firn areas. Because all accumulation measurements in the spring must be referred to known points on the glacier surface it is vital to keep them visible throughout the winter, and inspection is anticipated in November and February each year. Ablation and river discharge will be measured during the entire melt season by parties of 2-3 men who will also keep records of meteorological conditions. They will make summaries of all their observations so that the processing of data can be performed immediately after their return from the field in September.

A base camp will be established at all glaciers comprising at least an insulated hut for accommodation, a shelter for a snow vehicle and/or storage of supplies, one or more Stevenson screens for meteorological observations, and probably a shelter for an automatic stream gauge.

STAKE NETS

As measurements of both accumulation and ablation are referred to stakes placed on the glacier surface it is advantageous to plan carefully the pattern of the stakes. Ideally, the stakes should be scattered uniformly over the entire surface so that every part of the glacier is covered by an equally dense network of stakes. However, this ideal distribution pattern is not practical and it is suggested that stakes be arranged in one or another geometrical pattern to facilitate the daily work on the glacier. It is impossible to make a rigid recommendation for stake locations which would fit all different shaped glaciers, but for valley glaciers the most useful is a long line up the centre with transverse lines at regular intervals.

1. Stake location

One longitudinal profile is approximately along the centre line of the glacier (for numbering of these stakes, see below) and several transverse profiles are located at suitable intervals across the glacier from the snout to the firn area. The transverse profiles should be placed at right angles to the longitudinal profile. Crevassed areas and other "difficult" parts of the glacier must also be considered, although a less dense network might result in such areas, for safety reasons.


2. Numbering system

If stakes disappear or bad weather conditions make navigation difficult on the glacier a good system makes it easier for the crew to decide their location. In order that each stake can be easily identified it is necessary to have a logical system of numbering. There are several systems but the following has proved to be very useful for a valley glacier.

The "main" stakes that indicate the centre of transverse profiles in the longitudinal profile are numbered 10, 20, 30, 40, etc. Stakes in the first transverse profile have odd numbers, 11, 13, 15 etc., on the left side of the glacier and even numbers, 12, 14, 16 etc., on the right side, Stake 10 is in the centre. Similarly, the next transverse profile at stake 20 will carry the numbers 21, 23, 25 on the left side of the glacier; 22, 24, 26, etc. on the right side. If it is necessary to insert more stakes in the longitudinal profile they could be numbered with figures not already used in the transverse profiles, as 18, 19, 28, 29, etc. For most valley glaciers there will be less than 10 stakes in the transverse profiles and sufficient numbers will be available for intermediate stakes in the longitudinal profile. An example is shown among the illustrations.

3. Replacement of missing stakes

If it is necessary to replace a stake which has disappeared a new stake can be inserted as close as possible to the "original" stake's position. The new stake

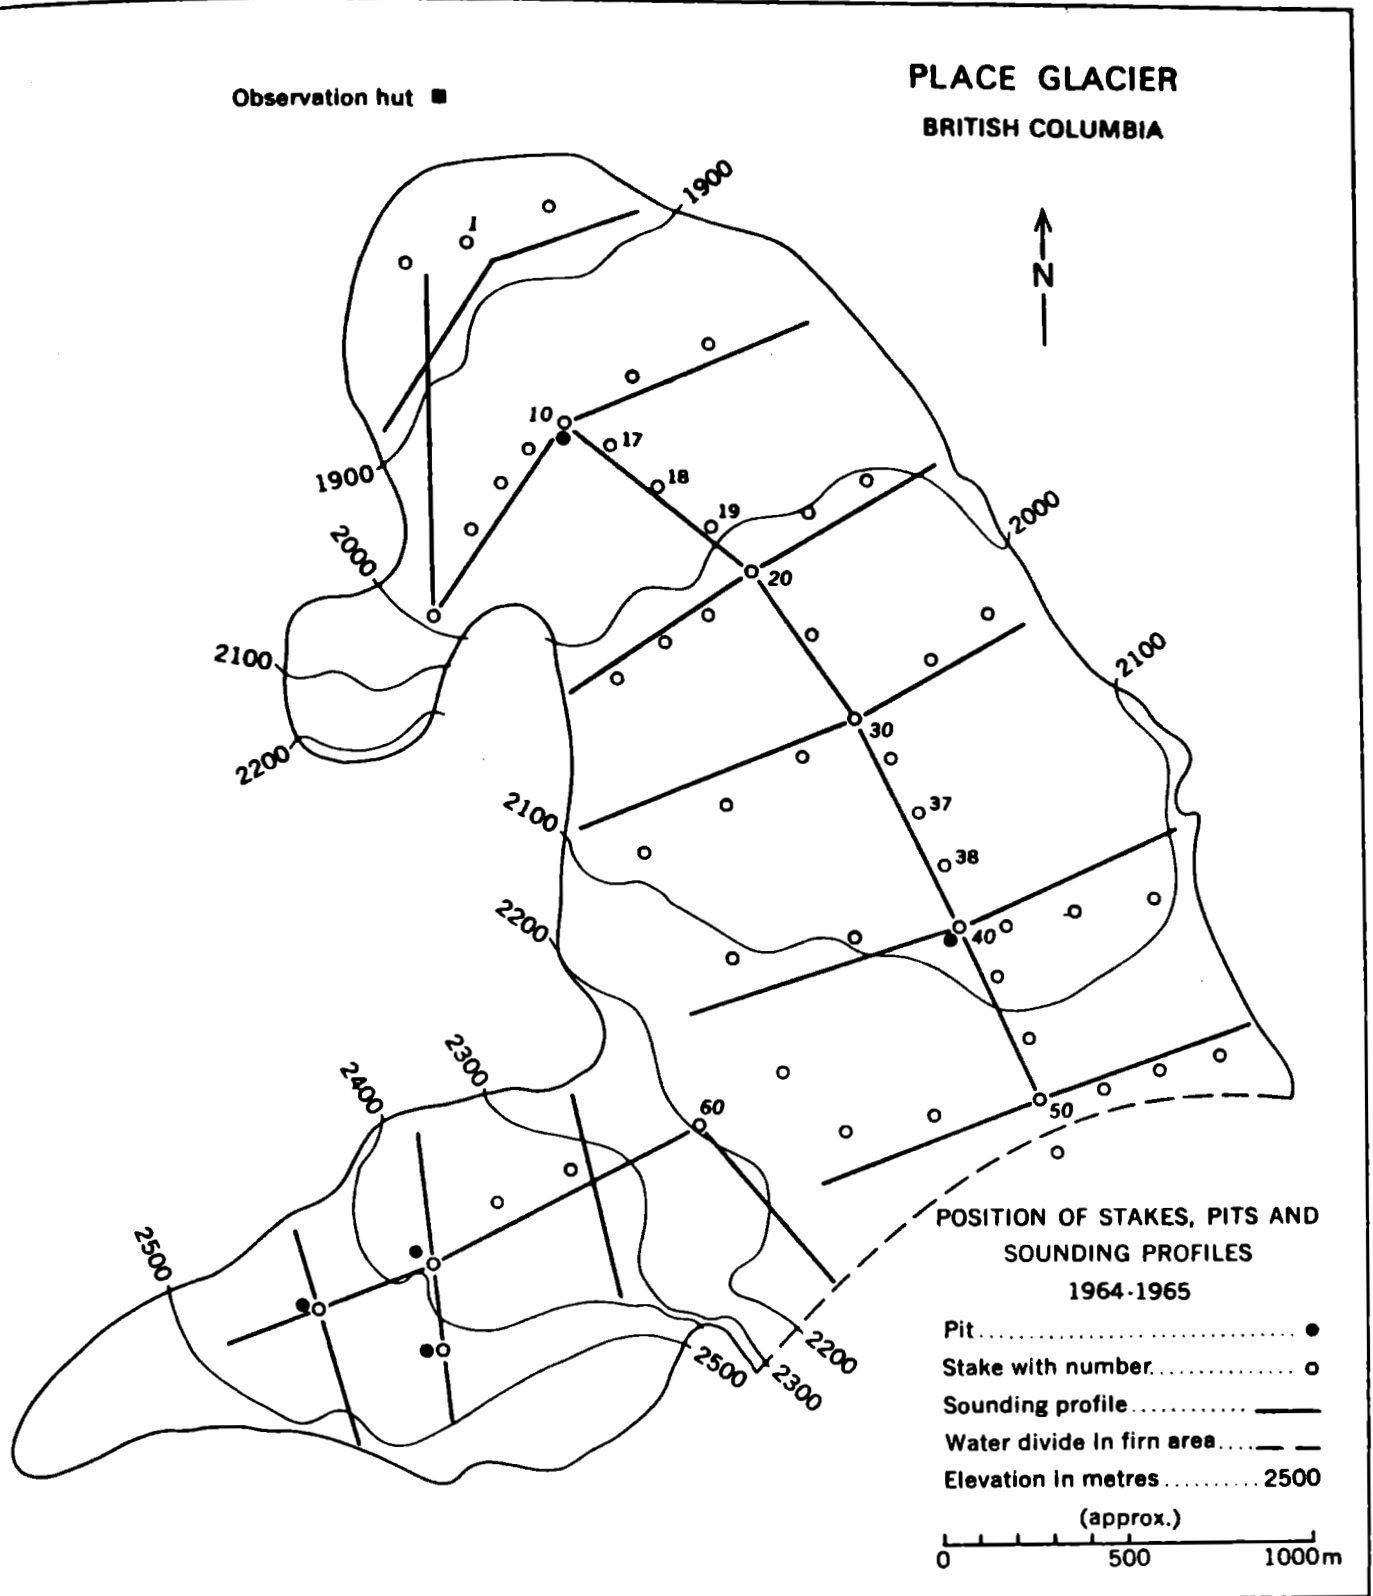

The stake net established on Place Glacier 1965 could be taken as an example of a suitable pattern for a valley glacier. However, the number of stakes in the upper part of this glacier is still too scarce and should ideally be densified.

should carry a number similar to the original but with a prefix which clearly separates it from the previous stake to avoid confusion if the original stake is found later in the season. Example: If stake 24 has disappeared a new stake numbered 124 should be inserted in the assumed position of stake 24. (If the total number of stakes on the glacier is greater than 100 the prefix should be 2. In this case the new stake would consequently carry the number 224). If also this stake disappears, the replacement should be given the number 324, etc. If the original stake is found later, the replacements should be removed from the glacier immediately.

4. Duplication of stakes

To mark the position of a very short stake so that it can easily be found for triangulation purposes, etc., a duplicate stake should be placed adjacent to the original, but its number should carry a letter as a prefix. Example: If stake 83 is hard to recognize (as it is located in a concave area on the glacier, or because only a small part of it remains above the snow surface) a duplicate must be given the number A83, and inserted close to the original stake. This duplicate stake could then be marked with a big flag to make the position of stake 83 clearly visible at a distance. For very accurate determination of its position the horizontal distance between the two stakes should be measured. In most cases, however, this will not be necessary.

If for any reason it is necessary to insert another stake at this location (if stake A83 has disappeared or has been bent down) this second duplicate stake should be numbered B83. A letter in front of a stake number would therefore always indicate a duplication of a stake in that particular point. The horizontal distance between a duplicate stake and the original stake should be kept to a minimum (i. e. in most cases less than 1 m). Note the difference between a duplicate stake and the replacement stake mentioned above ! The latter will probably be situated at a greater distance from the original stake.

3. Stake extension


For accumulation measurements made in the spring (see next chapter) it is necessary to know the exact location of all sounding profiles. Therefore, it is important to keep at least the main stakes visible as a system of reference. In the fall it is almost impossible to erect a stake long enough to survive a full winter's snow accumulation, although such arrangements have been made on the South Cascade glacier, Washington (see Tangborn, 1963). The simplest way to keep stakes visible is to extend them by inserting a short steel pipe inside the stake and adding a 2 m long extension tube to the top of the original stake. To number the extension, use the same number as the original stake but with a suffix to show that it is an extension. Example: Stake 70 is extended in November by adding a 2 m aluminum tubing. This extension piece will be numbered 70/1. In February only the upper part of this extension may be above the snow surface (with the number 70/1 visible), so if a second 2 m extension piece is put on top of the first, its number will be 70/2. From the start of the melt season these extensions are successively removed until the original stake is again visible.

Photographs demonstrating details of stake extension work are shown among the illustrations.


4. Technique of inserting stakes

The best material for stakes on a glacier is probably aluminum. Although bamboo is far cheaper it has some pronounced disadvantages. Firstly, its physical strength is not sufficient to withstand heavy storms, especially if hoarfrost becomes attached to the stake, as is normal in humid (maritime) areas. Secondly, the surface becomes bleached and it is difficult to recognize the stake in foggy or overcast weather. In such cases the advantage of a metal stake is obvious. In some extremely humid areas, however, (near the western coast of Norway), even aluminum poles are too weak and must be replaced by steel stakes.

STAKE EXTENSION AND SURFACE MARKING

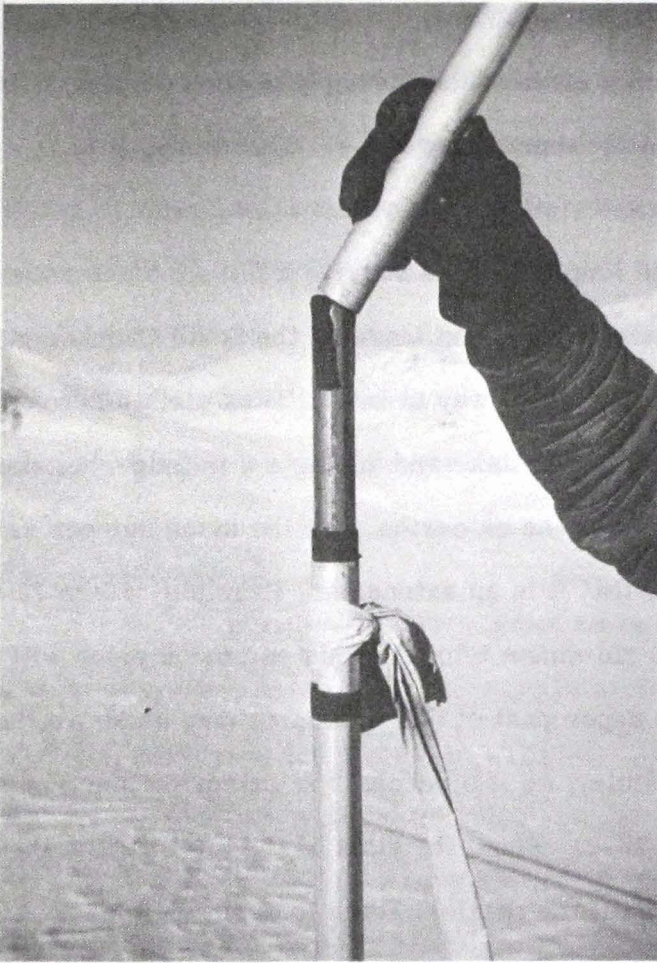

The top of the aluminum stake is marked with a strip of cloth. A steel pipe has been inserted in the stake and is held in position by friction tape. The aluminum extension is being placed on top of the original stake. The steel pipe (30 cm long, 1' diameter) will hold it in a vertical position.

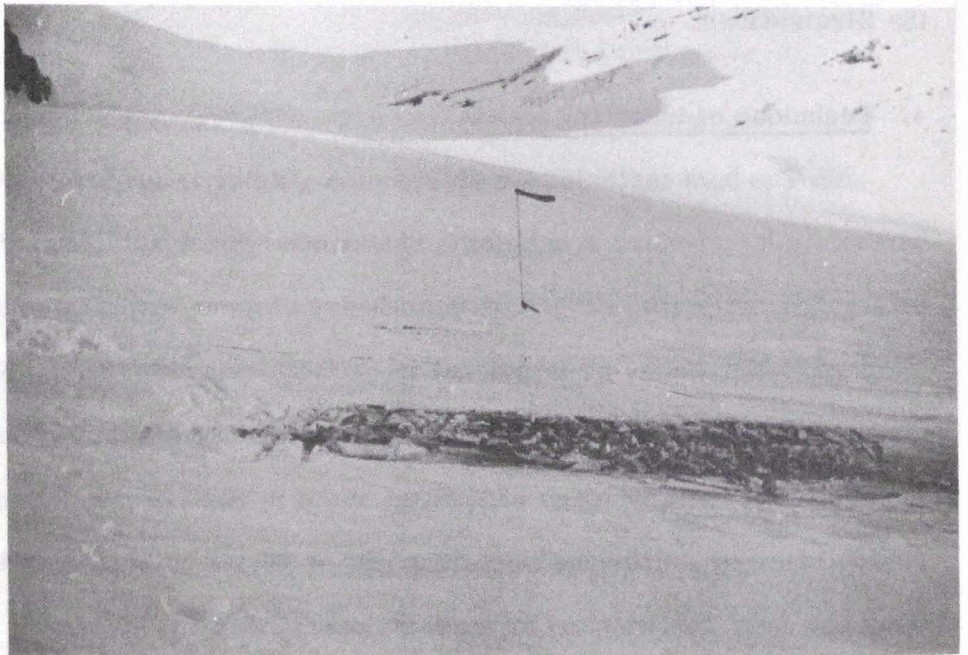

Another flag is fixed to the top of the 2 metre extension. An area in the foreground, 10 metres from the stake has been marked by powdered dye to obtain a datum for pit studies in the spring. Picture taken at Peyto Glacier, November 1965.

For the Canadian glaciological work "65 ST 6" aluminum alloy tubing has been selected with 1 1/4" outer diameter and a wall thickness of 0.065". This is cheaper, but almost as strong as dur-aluminum. All drilling equipment, extension tubes and inserts etc. have been standardized so that there will never be any confusion in size. The optimal length of the stakes is 4 to 5 metres, but all stakes should be cut so that their length is 4 m or 5 m, exactly. Usually the tubing is delivered in standard lengths of 14, 16, or 18 feet but intermediate lengths can be delivered on request.

Before any stake is inserted in the glacier it should be marked all around the circumference by pencil and paint for each metre to facilitate the reading when the stake has been inserted.


Stakes are placed vertically in the glacier by:

- (1) pushing the stake into the snow or firn (this applies to the upper part of the glacier only).
- (2) inserting it into a hole drilled previously with an ice drill (hand operated or motor operated mechanical drill) or a hot point.

The hole must have a diameter of 1 1/2" and should be so deep that only a small part of the stake remains above the surface. 10-20 cm is sufficient if the stake is drilled in at the beginning of the ablation season, but if it is drilled in near the end of the season, 200-250 cm of the stake must be visible above the glacier surface. When less than 100-150 cm of the stake remains in solid ice, the stake is no longer reliable, for experience has shown that stakes remain in a fixed position relative to the surface only as long as the stake is still frozen into the hole. As soon as it is no longer frozen in the hole it must be redrilled.

Redrilling in the same hole may be impossible due to wet conditions in the ice. Any stake must be redrilled as close as possible to the original position. As a rule-of-thumb the stakes should be redrilled 1 m up-stream from their previous location, but if this area is difficult to drill, a new spot must be selected and its position noted. For studies of glacier movement this measurement is extremely

Complete set of tools for hand-drilling in glacier ice. 4-metre-deep holes can be obtained with this auger which consists of a seamless 1-1/2" steel tube; extensions are made of aluminum with 5/8" threads in the brass or bronze end pieces. The bottle contains alcohol to use if the drill freezes in a hole. The rubber mallet is used when clearing the drill, and the open end wrenches are for disconnecting extensions. The weight of the complete set is approximately 10 kilograms.

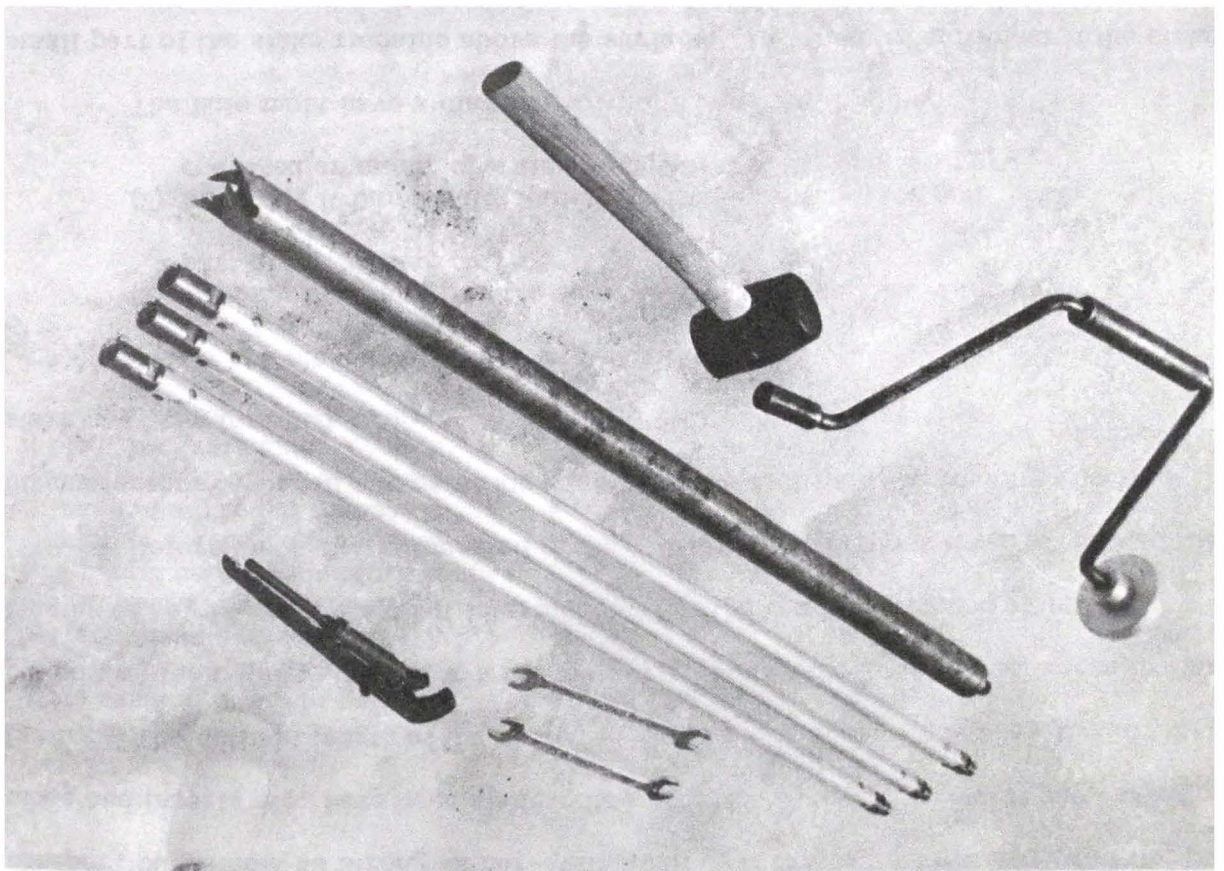

important. If very accurate measurements are applied, special precautions must be taken to ensure accurate calculation of the new position.

A hand operated ice drill consists of a seamless steel tube with 4-8 teeth cut into the lower end. The drilling equipment is shown among the illustrations.* To use a hand operated ice drill is something of an art and requires a distinct knack that cannot be explained in detail without simultaneous practical training. When the drill is rotated ice crumbs will accumulate inside the tube and hinder further drilling. Normally 50 cm can be drilled before the tube has to be cleared. Aluminum extensions with brass couplings can be attached to the drill so that holes 4-5 metres deep can be made easily by two men in 1/2 - 2 hours depending upon ice conditions, air temperature and the skill of the drillers.**

It is always advisable to drill holes for the stakes when the ice is cold and there is no melt water to percolate down into the hole. However, if the air temperature is above 0°C or there is strong sunshine the drill warms up and might freeze into the hole if the ice is very cold. Under such conditions it might be necessary to drill during the night. To loosen a drill frozen to a hole, alcohol or antifreeze can be poured into the hole immediately. Denaturated alcohol should therefore always be carried by the ice drillers.

To insert a stake in the firn area, it can be pushed down to the desired position or a hole can be drilled to facilitate the insertion. Metal stakes tend to sink in the firn and it is important to support the lower end before they are used to measure any variation in the snow or firn surface. To prevent sinking, the stake could be:

- (1) placed on the previous summer crust, this is a relatively hard surface and will support the stake more efficiently than any snow

*This equipment was developed in Scandinavia during the last 15 years, and can be obtained from: Institute of Physics (Verksmester R. Holm), University of Oslo, Blindern, Norway. Approximate cost is \$150.00 for a complete set.

**Other kinds of drills have been developed, many have a horizontal cutting knife and a long spiral along which fragments are raised. In cases when glacier ice is very wet this type of drill could have some advantages, although raising ice crumbs to the surface might still be difficult.

layer. However, when melt water percolates through the crust, the mechanical strength decreases and the stake will start to sink anyway.

- (2) placed on a small "platform" made of any cheap material plugged into its lower end. The simplest is to insert a cork or a wooden plug before the stake is put in position. If, furthermore, the stake is placed so that it rests on the summer crust; it is likely that it will be held in correct position for most of the summer.
- (3) placed on a plate that is larger than the stake diameter. This can be done by drilling a large diameter hole (SIPRE-type coring auger) and fixing a circular plate to the stake before it is inserted. This method has proven satisfactory under various conditions, provided the plate is strong enough.

If a pit is dug, a large plate can be laid at the summer surface, and the stake placed on it before the pit is filled up again with snow. This is a very satisfactory method, but it requires much labor.

In remote areas where glaciers will be visited only at long intervals or on glaciers where melt is greater than 4 metres of ice, it is advisable to use a hot point drill to insert a chain of stakes so that no re-drilling will not be necessary until the ice has melted approximately 20 metres vertically. No description or explanation of the hot point drill is given here as this is beyond the scope of this manual, but assistants who are occasionally working on glaciers where such stake chains have been inserted previously must be aware of the special technique involved in the observation of glacier melt at these stake chains (or wires frozen vertically into the ice). (See under the description of ablation measurements below).

A complete equipment for hand drilling comprises:

- a) a seamless steel tube 1 metre long with 4-8 teeth cut in the lower end and a 5/8" thread in the upper end.
- b) aluminum extensions 1 metre long with brass couplings fitting the above mentioned thread.
- c) handle with an operating radius of approximately 20 cm (this is more than a standard carpenter's brace).
- d) rubber mallet to clear ice fragments from within the drill.
- e) 2 open end wrenches or pipe wrenches to dismantle the drill and extensions.

- f) a bottle containing denaturated alcohol to free the drill if it freezes into the ice.

ACCUMULATION MEASUREMENTS

1. General

The total thickness of snow that accumulates over the entire glacier surface must be measured at the end of the accumulation season. (For most glaciers in southern Canada this will be during the month of April or May.) Snow will then start to disappear from the glacier surface due to strong radiation although ambient air temperatures remain below zero. Additional accumulation may occur during May and June and increase the total accumulation as measured in April/May.

Due to practical difficulties in visiting all glaciers at the right time it will be necessary, at least for some glaciers, to measure the accumulation prior to the actual end of the accumulation season. For such glaciers additional accumulation after the snow survey must be recognized and recorded.

To study the rate of accumulation during the winter it will be necessary to make several visits to each glacier and to make a complete accumulation measurement at each visit. However, the method will be similar to those used at the end of the accumulation season and they are described in this chapter.

As the accumulation is expressed in water equivalent it is necessary to measure snow depth and use a snow density factor to calculate the water equivalent in each measuring point. However, as snow density seems to be relatively uniform over large areas whereas snow depth normally shows large variations even in short distances, it will be necessary to make a great number of snow depth soundings and relate them to a comparatively small number of density observations. Snow depths are measured directly with a "sounding stick" or probe* which is pushed vertically through the snow pack to previous summer's crust (or the ice surface). The snow density is measured

*The swiss snow probe is made by Dr. P. Kasser, Abt. für Glaziologie, Voltastr. 24, Zürich 7/44, Switzerland.

by weighing a known volume of snow obtained from the snow pack between the existing snow surface and previous summer's crust (or the glacier ice surface).

Results of water equivalent determinations at numerous places are plotted on a map and lines of equal accumulation drawn. From this accumulation map the total accumulation, expressed in millions of m^3 of water equivalent can be calculated.

2. Snow depth soundings

Snow depth can be highly variable as deposition is greatly affected by topography and wind action. Prevailing winds will probably produce a deposition pattern of the winter snow cover which is similar from year to year for any particular glacier. However, great variations might occur even in two consecutive years and before the snow accumulation pattern can be anticipated it will be necessary to measure the snow depth at a large number of points. A density of 100 points per km^2 will probably be desirable for a valley glacier whereas a less dense network might be sufficient for a large ice cap.

Ideally, the measuring points should be uniform over the entire glacier surface. However as this is not practical soundings along profiles are recommended:

Sounding profiles (i. e. straight lines along which soundings are performed at equal intervals - normally 50 metres) should be laid in a pattern which will cover the entire glacier. If snow conditions are more or less known from previous experience, a skeleton network could be placed in areas of even snow distribution and a denser network in areas where large local variations are expected. Even distribution generally occurs on the tongue or on the intermediate part of the glacier, whereas wide variations are commonly expected in the upper firn areas, that also tend to have greater thicknesses of snow.

The easiest method is to locate sounding profiles between the "main" stakes down the length of the glacier and extend other lines at right angles to this center profile. At 50 metre intervals along all profiles, snow depth should be sounded to

the nearest cm.

It is advisable to plot all field measurements the day they are obtained. In this preliminary plotting all figures will express snow depth only and not water equivalent, but they will show any irregularity in distribution and determine the position of additional sounding profiles.

It is advantageous to first sound the snow depth on the glacier tongue for two good reasons:

1. The previous summer surface is represented by glacier ice and there will be no doubt about the location of the lower boundary of the winter's snow.
2. The snow cover will be thinner than on the upper parts of the glacier and untrained personnel will rapidly gain experience in using a snow sounding rod.

As snow sounding profiles are extended into the accumulation area at higher altitudes, it may become difficult to locate the lower boundary of the winter snow pack. During a warm summer a rigid "summer crust" will be developed and its location can be detected with a probe. However, during a cold summer, no real "summer crust" develops, and summer snow falls may give a number of poor developed crusts. It becomes difficult to decide which of them should be defined as the previous summer's surface. *

Generally the greatest variations in snow depth can be expected in the upper part of the glacier which also has the heaviest accumulation. It is important to spend more time in this area and have more sounding profiles than on the tongue. Generally travel becomes difficult and each sounding takes more time so work may take 2-3 times longer than on an equal area on the glacier tongue.

Before the soundings are completed on the glacier, make sure that all data are plotted on a map and contours are drawn to show areas of equal accumulation.

* If such conditions are observed during the ablation season in a particular year, special measures should be taken by the crew to mark a surface which could be defined as that summer's crust (see later).

Additional soundings might then be necessary in areas where it seems difficult or impossible to interpolate the data to obtain a reasonable pattern.

All snow depth soundings must be converted into figures of water equivalent using density determinations obtained from snow pit studies.


3. Pit studies

The density of the winter's snow pack will generally show little variation in areas of approximately equal altitude. The number of pits necessary to obtain accurate accumulation measurements will depend on the range of altitude for each glacier. If time is very short it would be advisable to dig at least 3 pits, one on the tongue, another in the middle part, and one high up in the firn area. Intervening pits should be dug according to the time available.

Before digging a pit, first make a number of snow depth soundings to determine the depth which will be necessary for the pit and to ensure that no crevasses are present. The initial hole must be large enough that the final pit will be at least 1 x 1 m at the bottom. Digging should continue approx. 50 cm in the old snow (firn) below the previous summer's crust. Normally the pit will have a square or a rectangular cross section and before starting one must decide which of the four sides should remain untouched. Otherwise it will be impossible to determine the original upper surface of the snow pack. To avoid changes in snow conditions due to direct sunlight, it is advisable to select the southern pit wall for sampling.

If a pit is dug near an existing stake it should as a rule be dug at a standard distance downstream from the stake. A distance of 5 or 10 m is recommended. The same distance should be maintained for all pits dug on the same glacier. If there is no stake at the pit location it is advisable to place a stake there, because if repeated pit studies are necessary, the exact location can be easily recognized at each visit.


Snow samples are taken vertically in the pit wall from the untouched snow surface downwards to approx. 50 cm below the previous summer surface. The samples

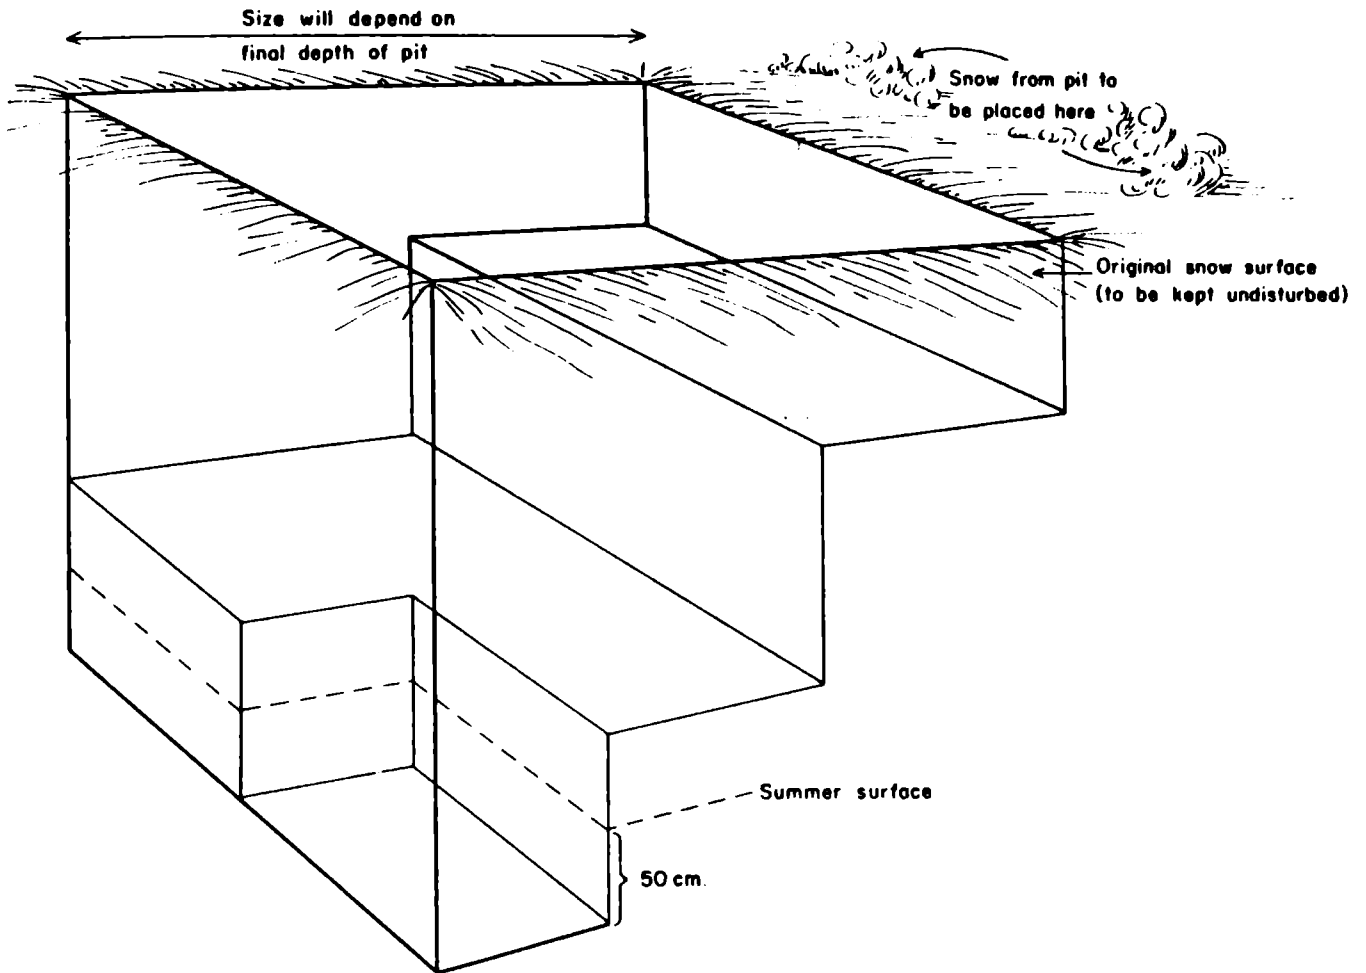


Sketch of a snow pit

Time and labour can be saved if the pits are planned properly. At least one wall should be vertical (preferably on the southern side of the pit), extending from the undisturbed original snow surface down to 50 cm below the previous summer's crust. Snow dug from the pit should be placed near the edge to facilitate refilling the pit. For deep pits, it is advisable to use a large bucket and a rope to rise the snow from the deeper parts of the pit.

- 20 -
SNOW SAMPLING TECHNIQUE

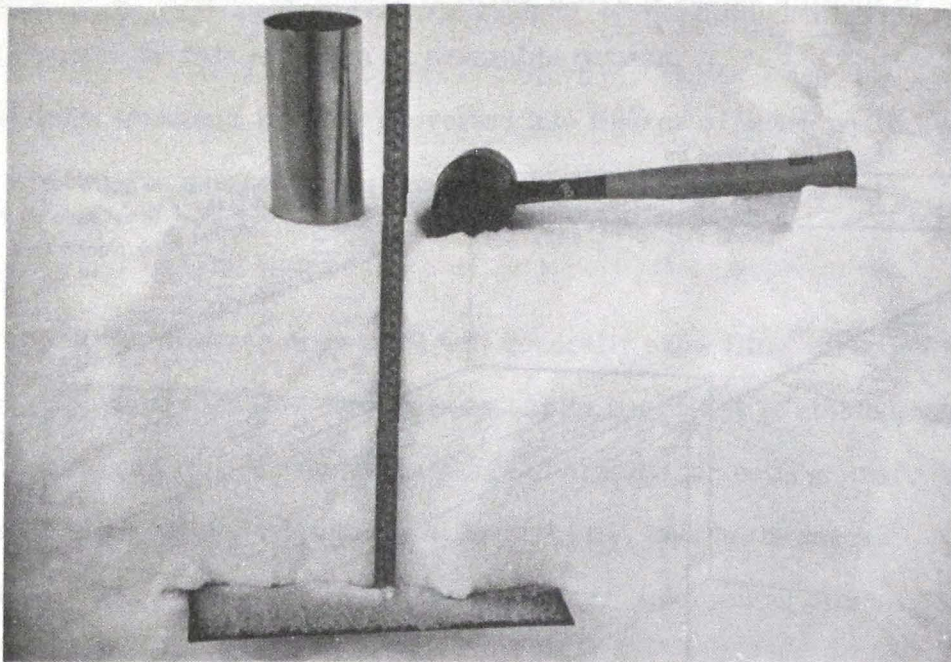

The steel plate is pushed horizontally into one of the vertical walls in the snow pit (in this case 30 cm from the original snow surface). The sampling tube is then pressed vertically down to obtain a sample of the upper 30 cm of the snow pack.

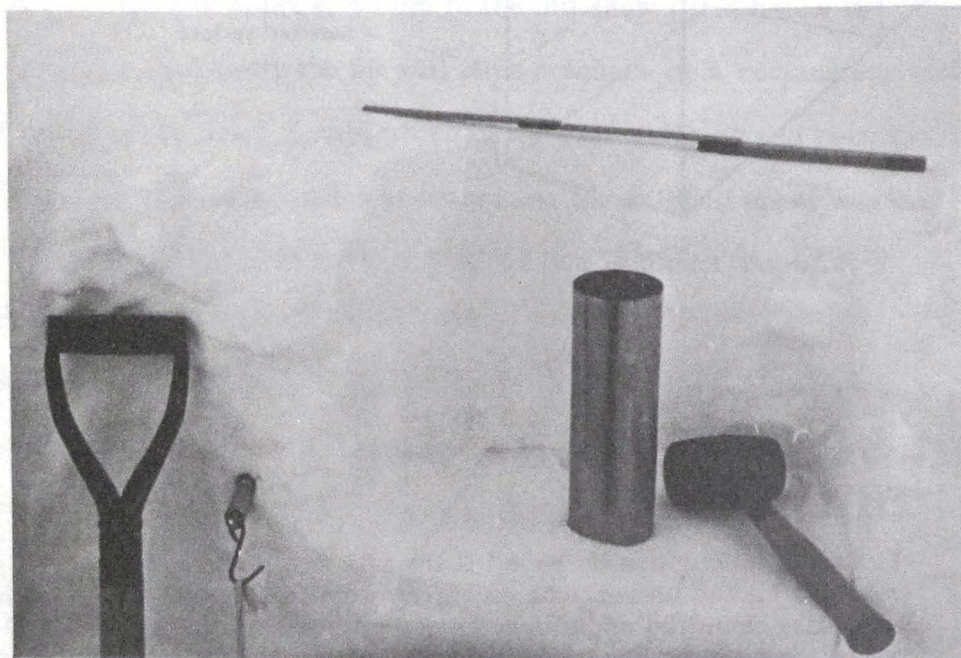

The area for the first snow sample has been cleared, the steel plate moved another step downwards and the steel cylinder pressed into its second sampling position. The ruler indicates the original snow surface, the rubber mallet is resting on the surface introduced by the steel plate shown above. The small spring balance can be seen to the right of the shovel handle.

must be taken continuously but the length of each sample is arbitrary, its length being normally determined by the physical condition of the snow, presence of ice layers, etc.

To obtain the sample: push a steel plate horizontally into the undisturbed pit wall about 20 to 40 cm below the surface, then push a stainless steel snow sampling tube vertically downwards onto the steel plate and measure the vertical distance between the surface and plate to the nearest 0.5 cm. This is the length of the sample and although snow may settle inside the tube it will not effect the density measurement.

Remove some of the snow from the pit wall to release the sample tube and transfer the content of the tube to a suitable bag. Weigh the bag and contents with a 1,000 gram spring balance* to the nearest 5 gram. Subtract the weight of the empty bag to obtain the net weight of the snow sample.

The length and weight of the sample must be noted carefully (for completion of appropriate forms, see below). From these figures the snow density and water equivalent can be easily calculated and a diagram of their variations with depth constructed.

If sampling is performed in warm weather or during a day with strong radiation the sampling tube might become warm and snow may stick to it. Then it will be difficult to transfer the snow sample from the steel tube to the plastic bag in which it is weighed. It might be necessary to push out the snow with a piston or work during the nights when temperatures are low. A thin layer of wax on the inside of the snow sampler might also help .

A series of temperature observations should be carried out at regular intervals in the snow pack to determine if melting has occurred. If freezing temperatures are present in the lower part of the snow pack no substantial amount of melt water has disappeared and the water equivalent observations would be reliable except for surface evaporation. The amount of evaporated snow is difficult to determine but for most

*A suitable balance can be obtained from Thorolf Gregersen, Tollbugt. 24, Oslo, Norway, for approx. \$9.00.

purposes it may be neglected.

After completing all measurements, mark the previous summer surface with a layer of saw dust, powdered dye or with a plywood or masonite sheet. First, the bottom of the pit must be filled with clean snow to the level of the previous summer crust. The datum of powdered dye will make it easier to recognize the actual summer surface later in the season because percolating melt water will form ice layers in the snow pack and, eventually, loosen the summer crust. The boundary between last winter's snow and firn from previous years will gradually be obscured. Pits that are dug later in the summer should be located so that the above-mentioned datum appears in a corner of the new pit.

Even if continuous study of snow density and water content variations is not made, it will be necessary to dig pits at the end of the ablation season to measure the remaining part of last winter's accumulation. For further details, see chapter on ablation measurements.

4. Density determinations performed from the snow surface

Many attempts have been made to avoid time-consuming pit digging to obtain snow density values, but one of the main difficulties in all these methods is to recognize the previous summer's surface, i. e. to what depth the sampling should continue. Another problem is the accuracy of these methods (Williams, 1964).

a) The coring drill

With a SIPRE type coring drill it is possible to obtain snow samples similar to those taken with a cylindrical snow sampler. However, due to variations in physical conditions (degree of packing, crystal size, density), almost each time the auger is raised the snow core breaks and a part of the sample core is lost before a density measurement can be made. Special precautions must be taken to ensure that measured densities are valid for the whole snow pack. Example: The coring auger has been

lowered 50 cm in the hole and a 50 cm cylindrical snow sample should have been obtained. When the auger is raised the length of the sample is only 45 cm. The water equivalent of this sample will therefore be approx. 10 per cent less than expected and a correction must be made accordingly. To make the correction a special form has been developed for field use, and it is described in a following section. It is advisable to check at least some of the results obtained by the coring auger with pit studies at the same location. In loose snow such check is vital, as the coring auger has shown a tendency to over-register the density of light snow.

b) A radioactive method

A method based upon radioactive penetration is described by Danfors et al 1962, Leighty, 1966, and others. A specially designed probe is lowered into a hole and the average water equivalent is determined for snow within a radius of 12-40 cm from the probe. With this device it is essential that the hole has parallel walls because air between the probe and the snow will give erroneous figures for the water equivalent. There are also some problems with calibration. The total weight of necessary equipment is higher than the weight of a complet SIPRE coring auger, and is not yet practical for field use.

5. Additional Accumulation

Snow that falls after spring accumulation measurements have been made must be accounted for before the total accumulation is computed. This correction for "additional accumulation" can be made either by using precipitation observations from a meteorological station or by direct measurements on the glacier surface. In the first case the amount of precipitation between the snow survey and the end of the accumulation season can be used in connection with a correlation coefficient and calculations of prevailing temperatures on the glacier, see below. In the latter case a simple measurement is made of the actual snow cover which has developed between the snow survey and the beginning of the ablation season. This method is the most

reliable and should be used whenever possible. It can be facilitated by marking the existing snow surface at the time of the snow survey with masonite sheets anchored to the stakes or scattering sawdust or powdered dye near the stakes.

During a short period in the spring some additional accumulation can result from rain falling on snow that remains well below 0°C. The rain water will freeze within the snow pack and form layers that increase the total amount of accumulation. This kind of additional accumulation, however, will be negligible in temperate areas. To check the amount of additional accumulation pits should be dug at the beginning of the ablation season (especially in the firn area) and the total water equivalent measured in the snow pack. A comparison with figures obtained by the snow survey in April/May will indicate if a correction is necessary.

A meteorological method using precipitation data from a meteorological station is complicated for it is necessary to decide if precipitation will fall as snow or rain at the glacier on each occasion and, furthermore, to decide if rain water will freeze within the snow pack or not. If it does not freeze it is assumed that the rain water drains completely off the glacier, and does not increase the amount of accumulation. This statement is based on the assumption that the temperature of the firn is at 0°C. Such conditions are assumed to be valid for glaciers in temperate areas. (The conditions of additional accumulation are however completely different for a "cold" glacier in the Arctic.)

A direct measurement of additional accumulation should be made immediately after arrival at the glaciers in June.

6. Recording data and completion of forms

In this section data forms for snow pit work and core drilling will be described together with a table for snow density calculations and a nomograph. It is essential that the forms are completed in the prescribed manner.

a) The snow pit form

On this form, the first three columns should be completed at the pit. The next three columns are for calculations and the last column is for remarks. The following should be observed when the form is used:

1. Fill in the name of the glacier, the date etc., in appropriate space on the top of the form.
2. Column No. 1 should show the depth as measured from the original snow surface to the lower end of the snow sampler (i. e. to the horizontal steel plate mentioned above). Note that this column will show the total depth measured, If possible, use a hanging tape fixed at the original snow surface.
3. Column 2 shows the actual length of the snow sample or, more correctly, the vertical distance between the positions of the horizontal steel plate. It is important that the distance be measured before any snow is removed to release the snow sampler. Note that the actual length of the snow sample obtained in the steel cylinder might be somewhat less, as snow may compact during the sampling procedure. The cumulative value of figures in column 2 should agree with the figures shown in column 1.
4. In column 3 record the net weight of the sample (deduct the weight of any bag which is used in the weighing procedure).
5. Calculations necessary to complete column 4-6 can be simplified using a table that shows the density for a sample 10 cm long. If a snow sample is not 10 cm the obtained density must be multiplied by a factor shown to the right in the table. As this table gives only the density to be placed in column 6, further calculation must be made to obtain the figures necessary for columns 4 and 5. However, for any given length and weight, the water equivalent and density can be readily obtained from a special nomograph (See Example).

Note that the water equivalent for each sample is placed in column 4 and that column 5 shows only the cumulative value of the figures in column 4.

A diagram showing the variations in density with depth must be constructed as well as a diagram for the cumulative water equivalent versus depth. Both diagrams should be plotted on the same graph paper and an example of a combined diagram is shown among the illustrations.


SNOW PIT MEASUREMENTS - NOMOGRAPH


Using Length and Weight to determine
Water Equivalent and Density

NOTE: Sample tube is 41.5 cm² cross section

EXAMPLE

Length	Weight	W.eq	Density
22	320	7.7	.352

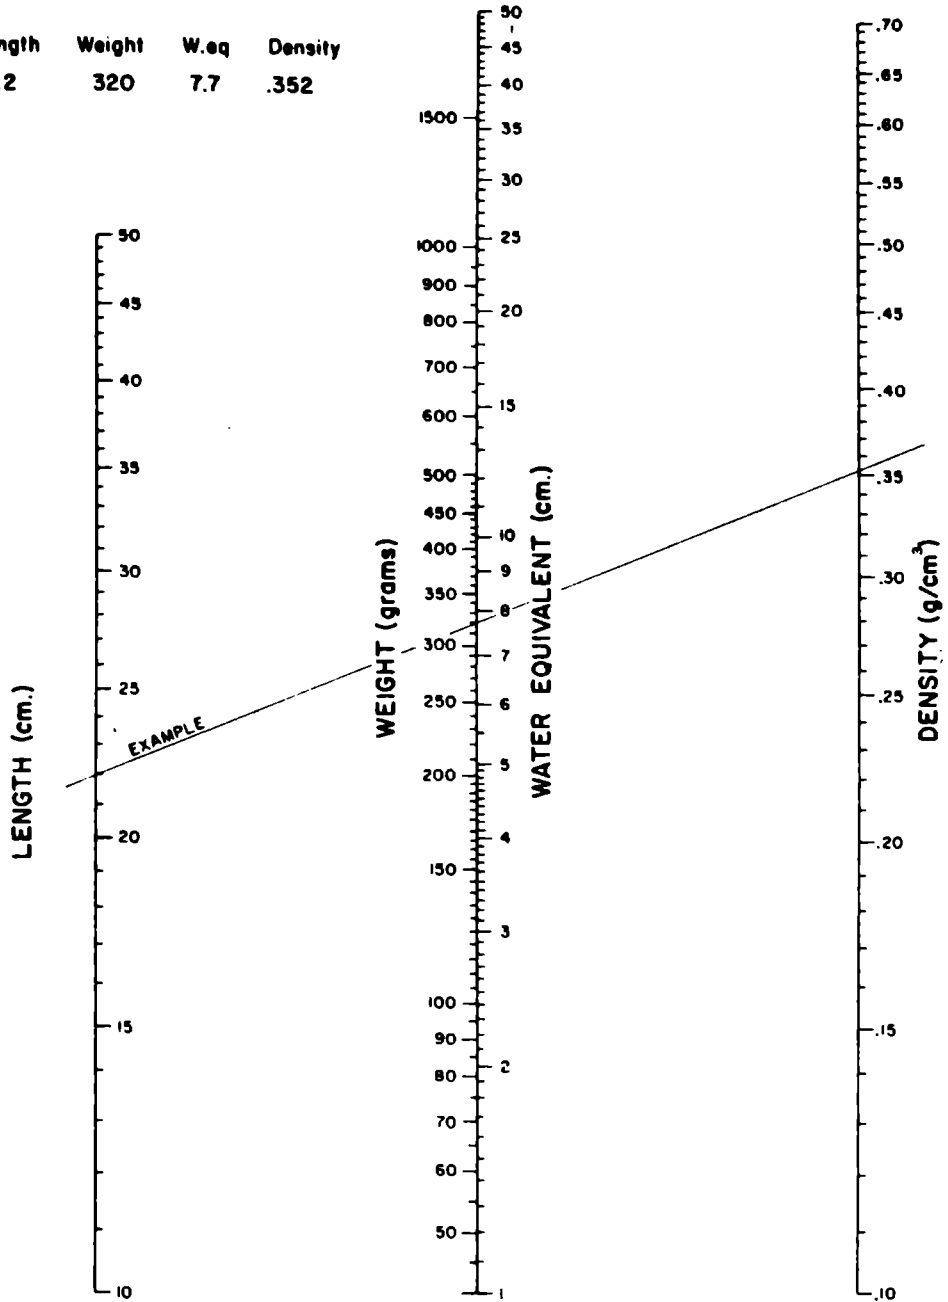

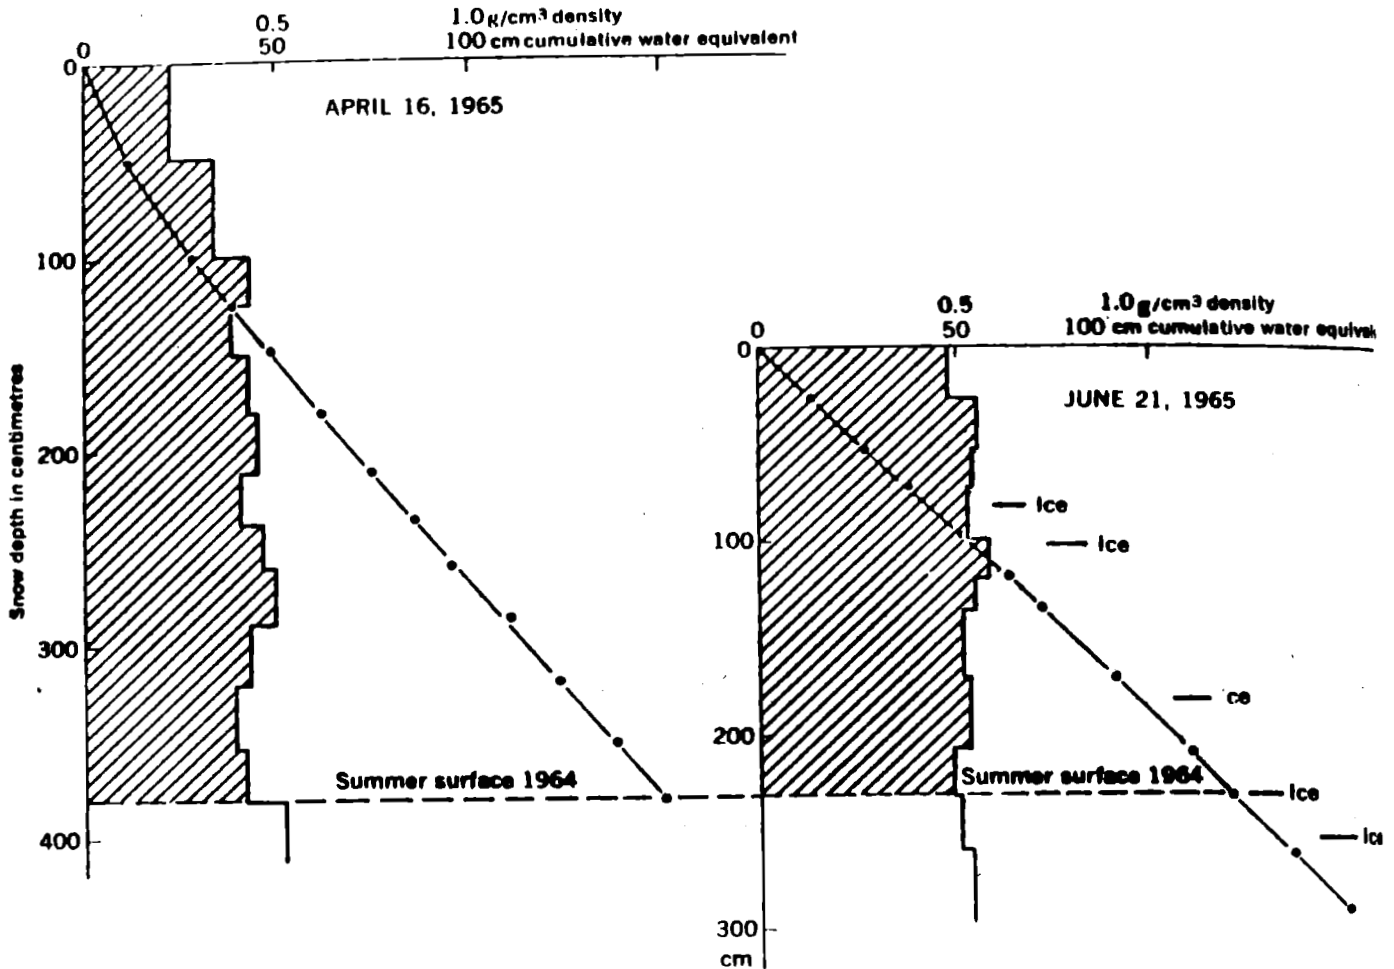

Place Glacier, Birken, British Columbia. Density diagrams (shaded) obtained in pits dug at the same location (elevation 2,440 m) in spring and in mid-summer. The dots show the cumulative water equivalent versus depth. During the first part of the summer the density of the snow had increased, partly by settling and partly by refreezing of melt water in the snow pack. The total water equivalent, however, decreased in the same time interval from approximately 150 cm to approximately 125 cm of water.

b) The coring drill form

This form is a little more complicated than the snow pit form but follows the same format with the following exceptions:

1. Column 1 shows the depth as measured from the original snow surface to the lower end of the auger. This can be measured along the drill extensions or on a probe carefully lowered into the hole.
2. Column 2 shows the distance of the drill between each sample, and is calculated as the difference between the depth of each sample.
3. Column 3 shows the actual length of the sample measured when it is removed from the auger. This length will normally be slightly less than the distance between sample depths. It can also happen that the sample has to be trimmed at the ends to make a proper cylinder.
4. Column 4 gives the net weight of the snow sample.
5. Column 5 shows the volume of sample. This figure can be obtained by multiplication of the cross sectional area with length of sample. There is no standard size coring auger and consequently no standard table has been constructed to calculate the sample volume.
6. Column 6 shows the density of the snow sample. Note that this is an actual density, calculated from the weight and volume of the snow sample (which is generally shorter than the drill penetration). This figure should be used when plotting the depth/density diagram (the depths taken from column 1).
7. Because the figure in column 7 is a subjective judgment made in the field, it is extremely necessary that the column is properly completed. Parts of a sample can be lost and thus no actual density measurements obtained for parts of the snow pack. The missing part might have the same density as the previous snow sample, or the same density as the next sample, or it might originate from a layer of very loose and light snow which cannot be sampled.

Any decision is difficult to make, but when using a drill the operator may feel when he is drilling in heavier snow and when he is penetrating loose snow. The decision must therefore mostly be based upon the working conditions when the snow sample is taken.

The cumulative value of figures in column 7 must agree with the figure in column 1.

8. Column 8 expresses the water equivalent assumed to be present in the area indicated in column 7. Note that this figure is the adjusted water equivalent and not the actually measured value for the individual snow sample.
9. Figures in column 9 are the cumulative values of figures in column 8, and can be directly plotted in the diagram.

ABLATION MEASUREMENTS

1. General

Glacier ablation comprises all material which is removed from the glacier by melting, calving, evaporation or wind action (Ahlmann; 1948, p. 26). The most important factor on mountain glaciers is melt, most of which occurs on the surface. Wind action is negligible and evaporation is dominant only for short time periods during the spring. The amount of material lost by evaporation is commonly only a fraction of the material which is removed from the glacier by melting. Investigations of the relationship between the many factors, the influence of meteorological parameters (air temperature, wind speed, humidity, radiation etc.) is extensively described in the literature and is not dealt with in this manual. (See, par example, Wallén, 1948 or Hubley, 1957).

The total amount of material lost from the glacier during the summer is called total ablation and it can best be obtained from observing the relative lowering of a large number of points on the glacier surface. (Ablation within or under the glacier ice is negligible compared with the melt on its surface). Changes of surface elevation can be measured by photogrammetric means and this method is still used to measure the volume change at a large number of glaciers in Europe and in North America.*

* For a number of Canadian glaciers terrestrial photogrammetry has been used to determine the glacier shrinkage or, more correct, the shrinkage of the tongue, by the Water Resources Branch of the Dept. of Northern Affairs. However, as this method only comprises the lower part of the glacier at figure for the total budget is not obtained.

The variation in total glacier volume from year to year can be obtained by photogrammetric means if the glacier is photographed at the end of each ablation season. This yearly variation in mass results from both accumulation and ablation and is defined as the glacier net budget. (A negative budget means that the glacier volume has decreased, a positive budget that it has increased). Terms used in this kind of investigation have been defined in a discussion of glaciological mass balance terms by Meler (1962). However, some modification of these terms were suggested as a result of further discussion at a field seminar at South Cascade Glacier, March 1966.

"Net budget total" is redefined as "Total budget"

"Mean specific budget" is redefined as "Mean budget"

"Cumulative mass flux" is redefined as "Transient budget"

Other glaciological terms were considered and the most useful for attention are:

Firn edge, summer surface and snow line (which represents the final position of the transient snow line).

Information of ablation can be obtained from the position of the snow line (the lower border of last winter's snow cover) at the end of the ablation season. However, under equal melting conditions it will be situated higher in a year of less accumulation and calculations of total ablation are difficult to base entirely on this concept. But a series of photographs showing the position of the transient snow line throughout the summer will be extremely valuable support in the construction of ablation maps. Such photographs should therefore be taken by the field crew at 5-10 days' intervals from suitable fixed points.

2. Stake readings

Lowering of the ice surface can be measured directly by comparing the visible length of a stake in a given time period. Example: A stake inserted in the ice has only 20 cm visible, but one month later it extends 120 cm above the ice

surface. This means that 100 cm of ice has disappeared and this represents an ablation of approximately 90 cm of water equivalent.

To obtain valid comparisons all stake readings must be made in the same manner and some "rules of thumb" must be followed:

a) For stakes drilled into ice:

A measurement is taken from the top of the stake down to the glacier surface and recorded to the nearest cm. The top of a stake is always easy to locate, whereas the glacier surface might be very uneven and difficult to determine accurately. To avoid large variations due to uneven topography, the ice surface should be defined by an ice axe placed on the ice touching the stake and resting in a direction perpendicular to the ice flow. If an ice axe is not available any straight rod or plank approximately 1 m in length can be used.

b) For stakes drilled in ice which is still covered by snow:

A measurement must include the visible length of stake (i. e. from the top to the snow surface defined similar to the ice surface above) and the snow depth. The snow depth is measured with a snow probe as outlined in the previous chapter. The probe is pushed down vertically in at least three places within 1-2 m of the stake. The arithmetic mean of these soundings is used for the snow depth figure at this location* and is noted on the stake form. (See further below under description of completion of forms).

At the beginning of the ablation season the glacier ice is relatively cold and percolating melt water will refreeze at the ice surface to form superimposed ice (Schytt, 1949). Superimposed ice will disappear later in the summer, at least on lower parts of the glacier. It must, however, be taken into account when short-term

* As snow depth alone does not give information of the water equivalent it will be necessary to determine the snow density from time to time. See previous section about pit studies.

studies are made of ablation variations. The amount of superimposed ice can be calculated from stake observations and must be shown on the stake forms.

c) For stakes in the firn area:

Stakes in the firn area are not normally supported in a solid mass similar to stakes drilled into glacier ice, some artificial support must be used so that the stake does not sink into snow or firn. See previous section describing techniques of inserting stakes! If a stake is not supported it must be expected that it will suddenly start to sink at any time during the summer and all subsequent readings will be false.

If a stake has an efficient support at its base the following measurements should be made at each reading:

1. Length from stake top to snow surface in cm.
2. Snow depth from the present surface to the previous summer's crust. This measurement is performed by a snow sounding stick and the summer crust identified by feeling a hard layer at or near the expected depth, based upon previously made observations. (Compare accumulation measurements in the area). However, formation of numerous ice layers within the snow pack might confuse measurements of snow depth. An ice layer can easily be taken for the previous summer's crust and the measurement would be worthless. To overcome this difficulty it is generally possible to make a snow depth measurement to a plate previously placed on the summer surface. The stake form will give information whether a plate is present or not.

Variations in snow density already mentioned in section b above will also apply to the snow cover in the firn area and consequently the snow density must be determined several times during the summer so that the water equivalent of the snow pack can be calculated.

d) Special stake chains or wires inserted in a hot point drill hole:

As mentioned previously, in areas of great ablation stakes may be replaced by a stake chain (or a wire) frozen vertically in the ice in a very deep hole made by a hot point drill. These stake chains or wires will not be visible until the snow has

disappeared and readings will give information of ice ablation only. Reading a stake chain or a wire is basically identical to reading a normal stake. The length of the stake chain or wire from its free end to the ice surface corresponds to the normal distance from the top of the stake to the ice surface. The only difference is that a considerably higher number may appear in the stake form if the stake chain or wire is several metres long.

To locate a stake chain or a wire on the glacier surface, it is advisable to drill in a normal stake and mark it with a flag.

3. Completing stake forms

To calculate variations of ablation throughout the melting season special stake forms have been constructed so that they account for all possible conditions. The form looks formidable and it might be difficult to complete it properly, but the following rules should be used as a guide:

a) Fill in all details requested at the top of the form. One form to be used for each stake. If duplicate stakes or replacement stakes are used, measurements must be recorded on separate forms.

b) Column 1 shows the date of the readings.

c) Column 2 shows the time difference between two observations and gives number of days between each reading.

d) Column 3 and 4 show the visible length of the stake. If ice is exposed, only column 4 is filled in; if the spot is still snow covered only column 3 should be used.

e) Columns 5-8 are to record snow depths at stakes which still have some of the last winter's snow present. Consequently, if the stake length was placed in column 4 (see (d) above) nothing should be put in columns 5-8 as no snow exists at the location.

If the snow depth is actually sounded (see description of stake readings in section (b)), the mean value of the three soundings should be put in column 5. From knowledge of the snow density (obtained by pit studies at the stake or in the same part of the glacier) the water equivalent of the snow cover can be calculated and the figure placed in column 6. Columns 7 and 8 are used only when soundings were not taken and the snow depth calculated from the stake reading alone. This might occur when time is very short or when a snow sounding stick is not available so that only stake readings can be made. The use of columns 7 and 8 should therefore be restricted as far as possible.

f) Column 9 is used for incidental notations, for example for a check of totals of figures shown in columns 3 and 5. This sum should be a constant but if great variations occur it is necessary to investigate more closely conditions at the stake to determine whether the depth to the summer surface has been miscalculated or the stake has sunk.

g) Columns 10-14 are used for calculations and should not contain any observed figures. The thickness of superimposed ice found by variations in stake length above the ice surface should be put in column 10 and its water equivalent placed in column 11 (assume a density of 0.8). Superimposed ice is regarded as accumulation, and this figure should be marked as positive.

The variation in water equivalent of the snow pack between two readings (compare column 6, or in extreme cases column 8) should be placed in column 12. Strictly, this will normally be a negative figure as snow disappears during the melting season but any additional snowfall in the summer should be considered positive.

The actual melting of glacier ice is recorded in column 13. This figure will always be negative. The difference in stake reading between the last two observation occasions should be noted, and the water equivalent calculated and placed in column 14 (assuming a density of 0.9).

h) Column 15 shows the total ablation between the previous two readings. The figure in this column will be the algebraic sum of figures shown in columns 11, 12 and 14. For practical reasons however, it can be shown without any prefix.

i) The cumulative value of figures in column 15 should be noted in column 17. If, however, it appears that accumulation has occurred (generally summer snow fall) between the two readings, column 16 will be used.

Column 18 shows the present situation at the stake, starting with the amount of accumulation as observed in the spring (being a positive value). During the melt season this value will diminish according to figures shown in column 17. At the end of the season the figures in column 18 might be very small or even negative (on the lower part of the glacier) if figures in column 17 exceed the original accumulation (i. e. all winter snow cover and some of the ice has melted). At the end of the season there will always be negative figures in column 18 where the glacier ice proper is exposed. At the equilibrium line, however, the final figure will be zero, indicating zero net accumulation and zero net ablation.

4. Pit studies at the end of ablation season

The total ablation must be determined at the end of the ablation season. On the glacier tongue this is easily determined from stakes where the entire winter accumulation has disappeared and glacier ice exposed. In the upper part of a glacier, normally, only a part of the winter's snow will disappear and it will be necessary to determine the water equivalent of the remaining snow. Depth soundings may be difficult if the boundary between the winter's snow cover and previous year's firn has been obliterated or obscured during the summer. However, recognition of the summer surface can probably be made in pits, and this work will be greatly facilitated if layers of sawdust, dye or other materials were placed at the bottom of a pit in the spring. If stakes in the firn area are inserted so that the lower end rests on the

previous year's summer surface, the thickness of the remaining snow can be readily observed, even when snow depth soundings are impossible to obtain. The density of the remaining snow cover, however, must be observed in pits redug at locations where the summer surface has been marked. The technique of measuring snow density has been described in the chapter on accumulation measurements.

PLOTTING AND CONTOURING


Most of the data from glaciological mass balance studies are processed graphically and some of the basic methods should be mentioned briefly in this manual. It is desirable that most of the preliminary data processing is done in the field, in order to obtain the final results as quickly as possible, so they can be readily published.

1. General

All accumulation and ablation measurements as well as some meteorological results (see below) should be plotted on a large scale map of the glacier. A scale of 1:10,000 with 10 metre contour intervals has been recommended. Such maps will normally be required for field use and a sufficient number of copies must therefore be supplied before the field work starts.

For the accumulation map the positions of the main stakes should be marked together with all sounding profiles showing the location of all snow depth soundings, which are given in actual snow depths and their water equivalents. Isolines should then be sketched to divide the glacier into areas of selected accumulation intervals. Example: Isolines could be drawn between areas that have accumulations of 100 cm, 150 cm, 200 cm etc. of water equivalent. The interval between the isolines must be selected for each particular glacier as it might be necessary to decrease or increase the intervals if the accumulation is unusually small or large. An example of a

PEYTO GLACIER ALBERTA

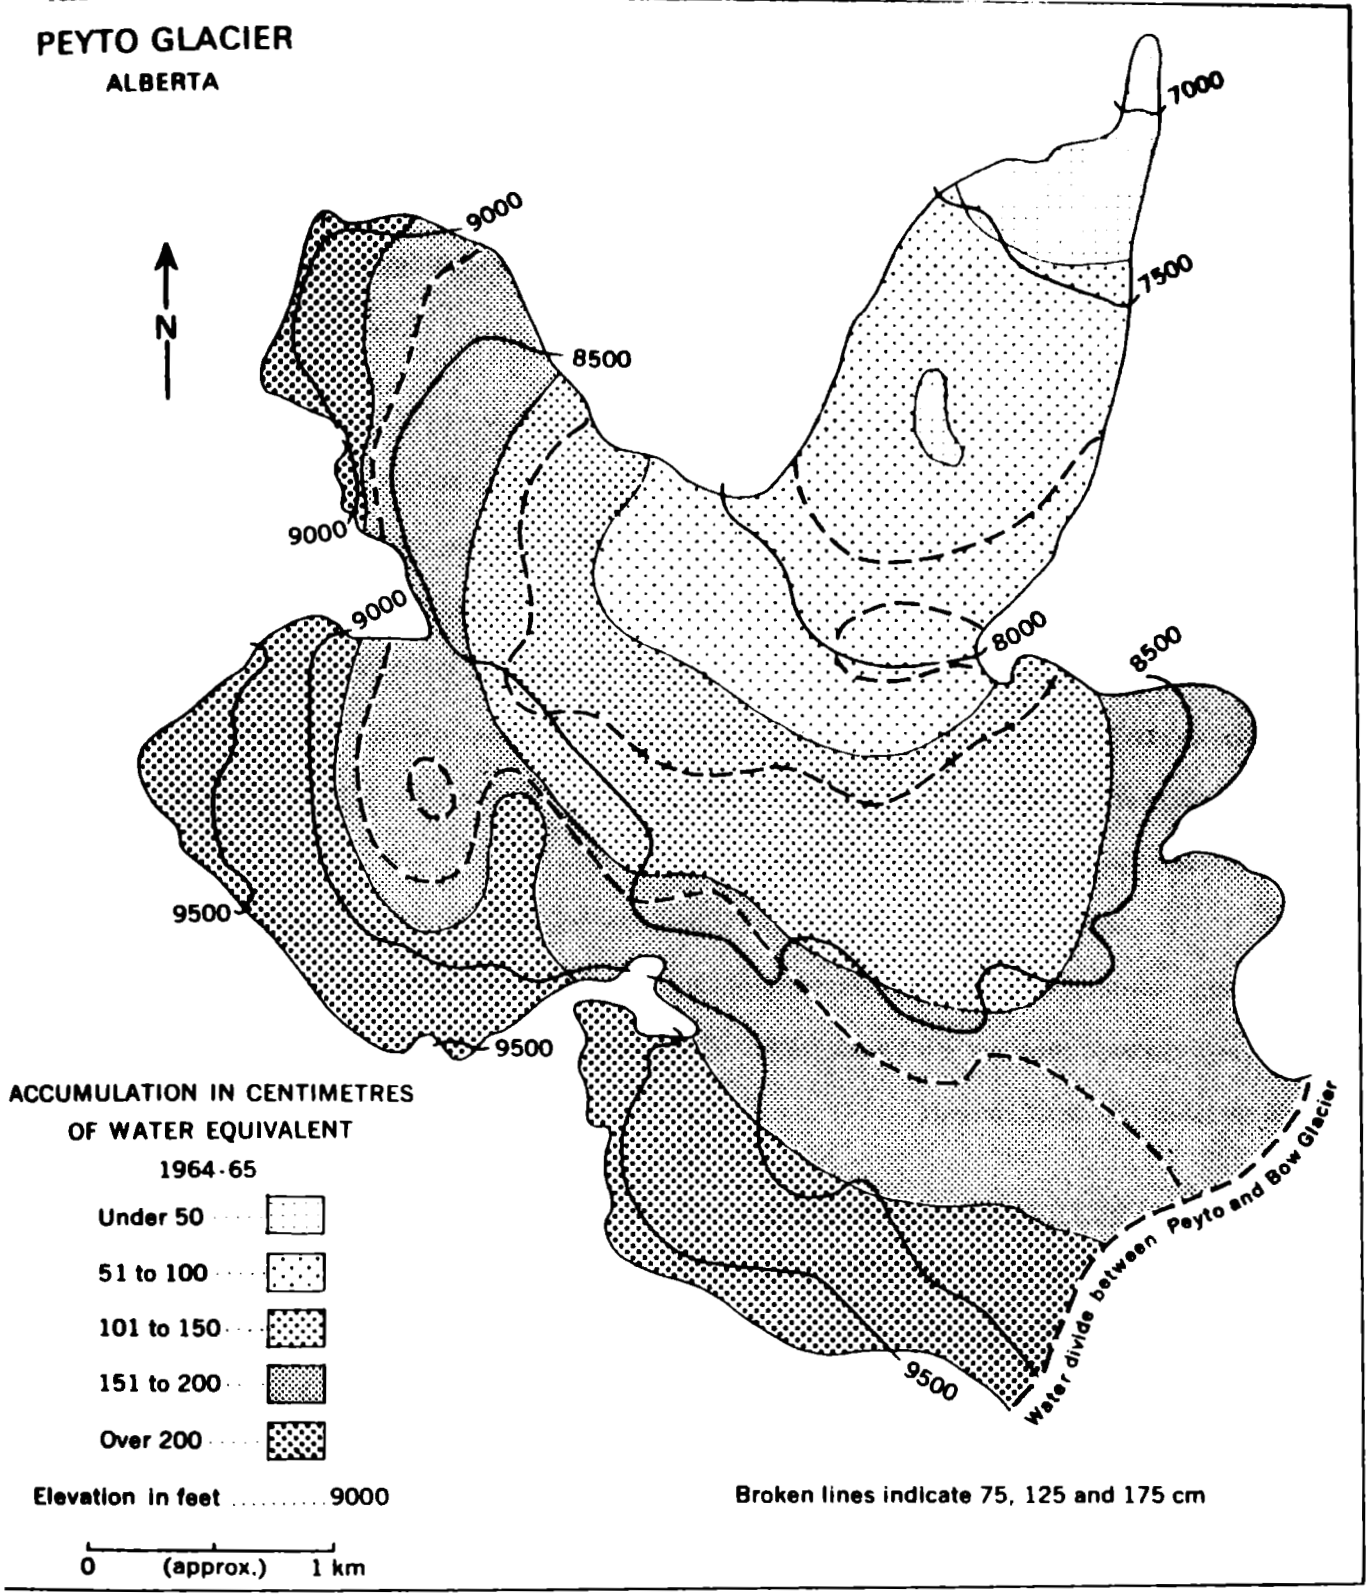

Example of a completed accumulation map based upon a large number of snow depth measurements. The sounding profiles are, however, not shown on this map.

completed accumulation map is shown among the illustrations.

Similarly an ablation map should be constructed. The ablation is more closely related to elevation and isolines will in many places almost follow contour lines on the map, although exceptions might result from shadow effects of mountains etc.

2. Ambiguities

When isolines are constructed it may be necessary to decide between two or more different possibilities, and the resulting map will for most alternatives give almost the same result for total accumulation or ablation. But for some choices the difference can be considerable and an example is shown among the illustrations. (Compare also an interesting paper by Dodd et al., 1965). If an ambiguous situation is discovered before the crew leaves the glacier a sufficient number of additional readings must be taken in the doubtful area. For this reason it is absolutely necessary to plot results immediately in the field.

A contoured map can be used to calculate the total accumulation or total ablation, respectively, using a planimeter in the manner described in recent reports on mass balance studies (Østrem, 1966). This work will normally be done in the office after the field season.


3. Use of colours on manuscript maps

Contour lines will normally be drawn on base maps to show areas of equal accumulation, ablation, etc. Practice has shown, however, that such maps are improved considerably by use of colours. Coloured maps will serve as a base for further calculations (such as area measurements by planimeter) and for drafting purposes. They will generally not be directly reproduced, but are considered as manuscript maps.

A standardized and consistent use of colours will facilitate future work on the manuscript maps, and therefore the following system should be used whenever


EXAMPLES OF DRAWING ISOLINES ON ACCUMULATION MAPS

BASIC DATA

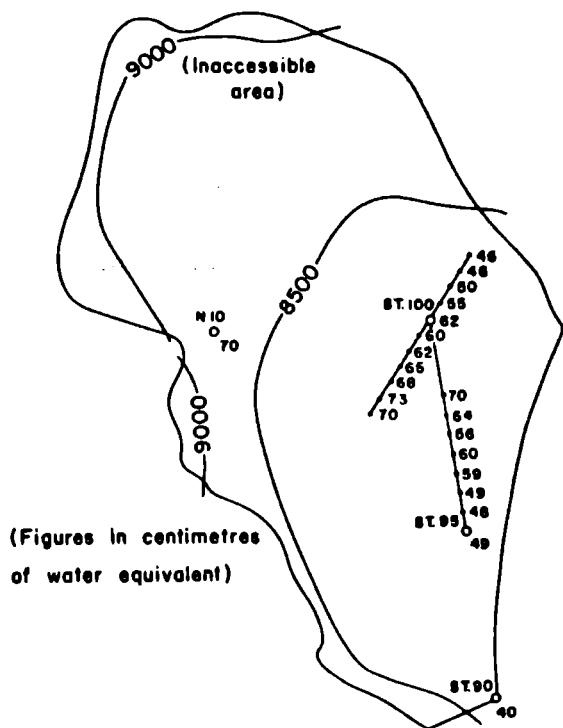


(Map section taken from N.W. portion of Payto Glacier, Nov.26/65)

Scale




(Figures in centimetres of water equivalent)

ALTERNATIVE No. 1

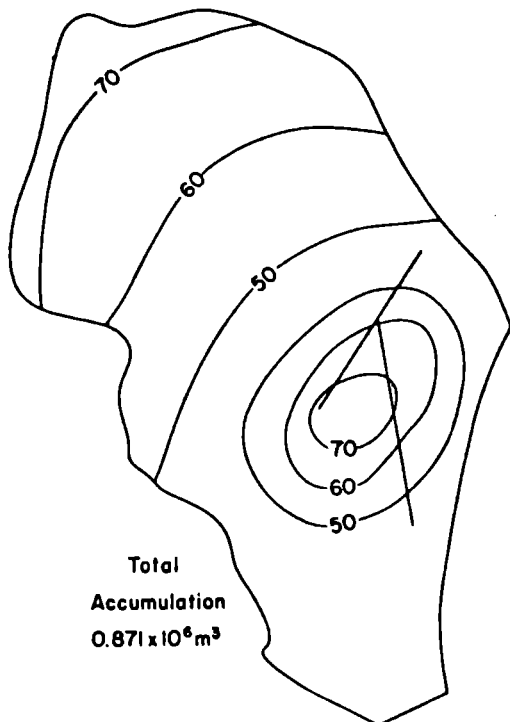

ALTERNATIVE No. 2

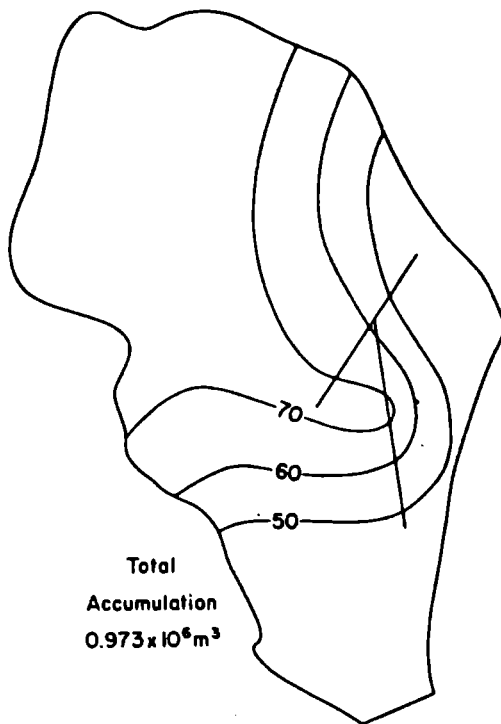

possible:

0 - 50	cm water equivalent	:	yellow
51 - 100	" "	:	light red or pink
101 - 150	" "	:	light green
151 - 200	" "	:	light blue
201 - 250	" "	:	orange
251 - 300	" "	:	grey or brown
301 - 350	" "	:	dark red
351 - 400	" "	:	dark green
401 - 450	" "	:	dark blue

METEOROLOGICAL OBSERVATIONS

1. General

In order to correlate ablation and run-off with meteorological conditions field crews will take daily weather observations. The observations consist of a few relatively simple readings which should be made at all glaciers. In addition, some more advanced observations might be added when detailed studies are desired. Only the basic observation program is dealt with in this manual.

The time of observation have been chosen so that it will not hinder glaciological and hydrological field work, i. e. observations should be made early in the morning and in the evening. However, to obtain data that are comparable with data collected at permanent meteorological stations, it is desirable that the observation time is simultaneous and the field crew should take the observations at the same time as the DOT weather stations in the area.

The basic observations consist of: air temperature, humidity, cloud cover, precipitation, wind direction and wind speed (estimated). Air temperature has a great influence on ablation so all temperature observations must be made as accurate as possible. To obtain a reliable figure for daily mean temperatures a thermo-hydrograph is to be installed in a Stevenson screen near the base camp. A second Stevenson screen will be placed on certain glaciers near equilibrium line or in the firn area.

2. Air temperature measurements

The thermohygrograph should be placed in the Stevenson screen immediately after the crew's arrival at the base camp. Charts are normally changed each Monday morning when the clock is wound and the pen filled with recording ink. The thermohygrograph registration is checked every morning and evening by simultaneous observation of the pen and the standard mercury thermometer placed in the screen. These two figures are noted on a form. Furthermore, a check of the clock is made by making a "time mark" every morning. Discrepancies between the time mark and the correct time are used when the chart is processed (see below). The calibration screw on the instrument could be used to adjust the instrument to as correct a temperature as possible at the beginning of the season but the adjusting screw should then not be touched during the season.

3. Cloud cover

To estimate the amount of incoming and outgoing radiation it is valuable to know the total amount of cloud cover (expressed in tenths). The daily mean cloud cover should be estimated for each day and if the cloud cover changes considerably during the day this should be mentioned on the form, and also whether the clouds are low, medium or high altitude. It is, however, not expected that the observer should have a complete knowledge of different kinds of clouds, but in case he has such knowledge a sufficient space is available for notation on the meteorological forms.

4. Precipitation

Precipitation is collected in a simple rain gauge (type Pluvius)* placed on the ground anchored to a rock. The rain gauge is reliable for observation of liquid precipitation and probably for wet snow as well. Snow must be melted before the measurements are made. Dry snow will generally be moved by wind and readings will not be reliable. Most of the precipitation, however, will probably be in the form

*Manufactured by Nyströms Bläckhårns-fabrik, Torshälla, Sweden, for less than \$2.00 each.

of rain so it is anticipated that the observed values will be reliable. One single rain gauge may not give representative results so a number of rain gauges must be placed in the catchment area and observations of the collected rain made by visits at suitable intervals. Daily precipitation observations will normally be made only at the camp or in its vicinity, but precipitation for several days might be collected in more distant gauges.* It is advisable, however, to visit all rain gauges as regularly as possible to facilitate calculations connected with comparisons between the run-off, ablation, and precipitation. Ideally, all rain gauges (and all stakes on the glacier) should be read at 5 day intervals. (If heavy precipitation has occurred, the rain gauge might overflow and intermediate readings are necessary). The total amount of rain water must be calculated for the whole catchment area by plotting all single gauge observations on a map. Assuming each gauge is representing a certain area, the total amount of water can be found graphically. The result is to be listed.

5. Wind direction and speed

Observation of wind direction should be made every morning and evening, most easily in connection with the temperature readings in the screen. The direction from which the wind travels is noted as well as the estimated speed in m/sec. To facilitate this estimation a feather or a small piece of paper could be allowed to travel a known distance in the wind and its speed calculated roughly.

6. Field processing of meteorological data

Meteorological observations must be summarized for each week, and the field crew will process all temperature charts and calculate daily mean temperatures as well as number of positive degree days. It is also desirable that the total amount of rain water is calculated as indicated in previous section, but the temperature summaries are the most important and must have priority.

*During cold periods it is necessary to use glycerin or antifreeze to prevent freezing of collected rainwater in the gauge. A known amount (corresponding to a few mm of rain) should be placed in the gauge, and corrections in readings made

As soon as a chart is completed and taken off the thermohydrograph the air temperature for each hour is read from the chart (corrected for errors in the clock mechanism and for temperature discrepancies, as found by the two daily comparisons with the mercury thermometer). A special form has been developed for this work. When the form is completed the daily mean temperatures should be calculated and the chart attached to the form and filed. At the end of the season both the form and the chart must be returned to Ottawa for further processing.

The number of positive degree days is calculated as follows: All the figures for positive temperatures is noted for each hour and totalled (negative temperatures omitted); the sum divided by 24 to give the number of "positive degree days" for that day. Such calculations must be made for each day throughout the summer. The resulting figure will coincide with the daily mean temperature if the air temperatures are above 0°C.

WATER DISCHARGE MEASUREMENTS

1. General

Water discharge and suspended load must be measured for the melt water stream at all glaciers in order to substantiate ablation calculations for each glacier. The discharge will mainly be the sum of ablation and summer rainfall. The silt content measurements can be used to estimate the amount of material eroded beneath the glaciers for different conditions. See further next chapter.

Discharge calculations are based upon water level readings on a vertical gauge or data from an automatic water level recorder. The relation between the level of water at a site and actual discharge (expressed in m³/sec) must be determined by numerous direct measurements of the river flow for different gauge readings to obtain a graph of levels vs. discharge, the rating curve, for each measuring site.


Direct measurements of water discharge can be obtained in many ways. For streams with "laminar flow" a standard current meter can be used to measure water velocity, but this method is difficult to use in glacier streams because they are highly turbulent. Turbulent streams can be measured using colourimetric methods but this is not recommended if the silt content is high. It is preferable to use a method which is independent of the silt content in the water, such as the "salt method". In this method (or in a similar method using soluble radioactive compounds), an agent is poured in the river in one point and at another point downstream the dilution will be a measure of the water discharge.

All direct discharge measurements are difficult to perform without training and specialized equipment. Therefore the methods will not be described in detail in this manual. For a closer description, see Østrem 1964.

As soon as a rating curve has been established all future gauge readings can be easily transformed to discharge figures. However, if the river cross section changes or the gauge sinks it is obvious that a previously obtained rating curve will no longer be valid and a new series of direct discharge measurements will be necessary to establish a new rating curve. It is therefore important that the crew observe conditions in the river and check the position of the gauge several times during the summer.

2. Stream gauges

A gauge is a vertical rod marked in metres and centimetres and placed so that the height of the water level can be measured on it. The gauge should be placed at a location in the river where the water is as tranquil as possible. A pool in bedrock may be the best site to erect a gauge and the gauge must be located so that both a small discharge and a very large discharge can be measured directly. In some streams, however, it may be necessary to use one gauge for very high levels and another gauge

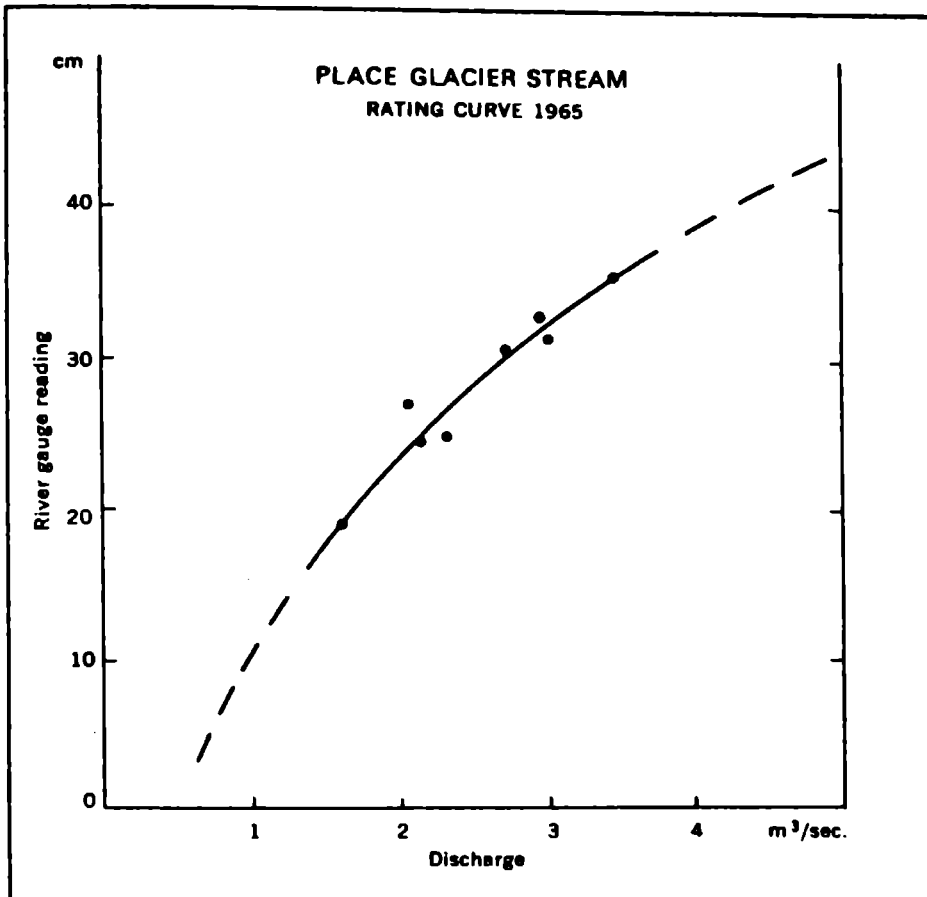

The relation between water level as measured on the gauge and the water discharge in the river is called the rating curve. This illustration shows the rating curve for Place Creek, based upon a number of discharge measurements made in August 1965 (black dots). It is necessary to measure the discharge at high, intermediate and low water levels within the expected range at the measuring site. Emphasis should be put on discharge measurements at high water levels as small errors in the upper part of the curve could cause great errors in discharge figures. This kind of graph could also be plotted on logarithmic graph paper. The graph would then commonly show a straight line, but due to local topography this is not always the case.

for the lower water levels, but it must be ensured that one and the same water level in the pool is always reported as a reading on the lower gauge. The zero point (the lower end of the gauge) should be levelled relative to three fixed points on bedrock near the measuring site to ensure that if the gauge is destroyed a new gauge can be installed to give identical readings. The reason for using three fixed points in bedrock is a security measure if any of the points should be destroyed or become inaccessible.

In the fall or when the water discharge is very low it is necessary to determine a reading on the gauge that corresponds to zero water discharge (i. e. generally the height of the threshold in the pool). This reading gives important information for construction of the rating curve.

3. Number of readings

Water discharge in glacier streams is normally subject to great daily variation so to obtain accurate information about the total discharge numerous readings must be taken throughout the day and night. However, for streams without an automatic gauge the crew may not have sufficient time to make the necessary measurements at all times. This difficulty can be partly overcome if frequent gauge observations are taken for a number of days and the variations in discharge during these days are considered representative for other days when few readings can be made. From experience obtained during the summer it will probably be possible to draw curves showing water level variations in the river based upon readings taken only three or four times a day. Two readings must be made in the morning (one as early as possible, another before departure for field work) and two readings in the afternoon or evening (one immediately after return from field work and another as late as possible). If the crew is not out for a full day's field work or weather prevents outside activities, additional readings should be made during the day.

Shortly after heavy rainfalls or during periods of very high temperatures a river will not follow the normal pattern so frequent observations become essential. Under special circumstances when extremely high discharge is expected the gauge must be observed every half hour.

4. 24 hour periods

To obtain information about the normal diurnal variations in water level and to construct a curve showing these variations it is necessary to obtain readings throughout a 24 hour period and assume that they are "normal". The curve can then be used as a standard to obtain daily variations estimated from three or four daily readings. The crew must therefore decide when "normal" conditions exist and select a period of 24 (or 36) hours and record the water level every hour and take water samples (see below). At least two or three periods must be selected during the summer. Ideally, the period should include times of low water discharge and high water discharge.

Furthermore, when it is obvious that an extremely high water discharge is expected it is necessary to make additional periods of similar measurements. They might be longer or shorter than 24 hours depending upon the discharge pattern. Any series of observations should always be combined with silt sampling for the amount of silt will vary according to the type of discharge. Under extreme conditions the readings and the water samples may be taken at shorter interval and if the river tends to rise to an extraordinary peak, all efforts must be concentrated on taking frequent readings and water samples. Periods of rising water level are more important for silt sampling than periods of constant or falling level.

5. Preliminary processing of results

To obtain discharge figures, all gauge readings must be plotted initially on millimeter graph paper using the vertical axis for gauge readings. When time is

plotted on the horizontal axis, one day might be represented by 12 centimetres, so that 2 (or 4) days can be portrayed on one paper sheet. For periods of small variations in discharge shorter units could be used on the x-axis.

Using the "standard" variations obtained from a 24 hour series, a curve can be estimated to show the daily variations in water level. It is advisable to construct this curve as soon as possible and the results should be plotted at least every week. Forms for notations of water level etc. have been developed and the daily notations must be transferred to these forms. All data connected with river observations must be kept in a separate binder.

6. Calculation of water volume

Calculations of the water volume discharged in a given time interval can only be calculated if a rating curve has been established. From the estimated curves that show water levels at the gauge it will be possible to calculate the water discharge for any given time. For rapid variations within short time intervals (compare charts from a thermograph) it may be necessary to calculate the discharged water volume for each hour or even shorter intervals. Experience has shown that a 6 hour period will generally be sufficient.

The volume of water discharge should be calculated for the following 6 hour periods: 0000-0600, 0600-1200, 1200-1800 and 1800-2400 (midnight). The greatest discharge will probably occur in the last two periods and special attention should therefore be given to possible variations within them (see above concerning number of gauge readings). Results of these calculations must be recorded on summary forms (sample forms are included in the appendix). It is anticipated that rating curves will be established during the latter part of the summer 1966 for most glacier streams and it must be expected that calculations of water volume for periods earlier in the summer must be done towards the end of the season.

MEASUREMENTS OF SUSPENDED MATERIAL

1. General

Glacier streams carry a great load of silt, sand, gravel and boulders that result from glacier erosion. To obtain information about this erosion it is necessary to take samples of the river water, analyze it for its content of suspended material and calculate the total transport. The bottom transport of fragments including boulders is difficult to observe and until methods for their determination have been developed it will be necessary to estimate the size of this transport. The amount of fine material suspended in water is easier to determine and the total amount transported daily can be calculated from known water discharge and analysis of silt samples. The results of these investigations will give not only valuable information for a study of glacier erosion under different conditions but also indicate possible rates of sedimentation that can be expected in reservoirs and lakes along rivers that drain from glaciers.

2. Location of sampling site

Water samples should be taken as close to the glacier as possible but below any confluence of melt water channels that originate from the glacier. Sampling site should be selected anywhere the water is turbulent so that the sample can be regarded as representative for the total water volume discharge past the site at the time of sampling. This means generally that the sample should be taken just below a small waterfall or in a section of extremely turbulent water.

3. Sampling method

Numerous water samplers have been designed but most of them are developed for use in streams of laminar flow and are not suitable for highly turbulent streams. Experience has shown that a simple method - a bottle is lowered into the turbulent water and raised immediately after filling - is probably as good as using any

complicated water sampler. It is important that the bottle is raised immediately after it has been filled with the river water, otherwise additional silt will enter the bottle (Hjulström, 1935, p. 386). The size of each sample should be 1 litre, but most bottles readily available are not calibrated to this volume when completely filled so it is necessary to measure the exact volume of the sample bottle. The volume of the water sample must be noted on the form where all silt sample data are collected.

4. Filtering

The bottle and contents must be carried back to camp or to a suitable place where no additional material can blow into the sample or filtering equipment. A tent without a floor could be erected near the river for this purpose. A filtering stand can be made by drilling holes in wooden planks. All water in the bottle should be poured into the funnel and passed through a filter paper that collects all suspended material. The filtered water (leaving the funnels after passing the filter paper) is normally not collected unless it is not clear. Then it has to be refiltered through a denser filter paper.

For all normal water samples a quick filtering paper (Munktell No. 00) must be used. If very fine fractions are present a denser paper (No. 0A) is necessary, but as this paper is slower filtering it should be used only in exceptional cases.

The bottle generally contains more water than can be placed directly in the funnel. It is therefore necessary to pour water in the funnel in small amounts with a result that for a sample the complete process might take one half to one hour depending upon the amount of silt. A sample with much silt may take even longer due to sealing effects of the silt on the upper surface of the paper.

After filtering (ensure that all silt which might have settled in the bottle is poured out) the paper is left to dry in air and it is then wrapped and placed in a small plastic bag within an envelope marked with the sample number and other pertinent data.

Only one filter paper must be placed in each envelope but all envelopes from one day's sampling could be collected and transferred to a larger plastic bag.

At the end of the season all silt samples must be packed together with the list giving all details (sample number, water volume, date, etc., see special form in appendix) and taken to Ottawa for laboratory analysis. The samples must not be sent by mail or freight but brought personally by a member of the crew as his hand luggage.

5. Numbering of samples

Samples should be numbered consecutively during the whole season. A record must be kept showing when the different samples were taken (time and date), the size of the sample (compare previous section) as well as information about unusual conditions at the time of sampling. Samples taken during the 24 hour periods could be regarded as a distinct set to separate them from ordinary daily samples, but to avoid any confusion it is strongly recommended that all samples be kept in strict consecutive order.

SURVEYING - HINTS FOR FIELD CREW

1. General

Glacier maps are being constructed for all the investigated areas as a base for plotting results, indicating stake locations and other data. For initial studies the provisional maps were enlargements of existing small scale topographic maps, but it is planned to replace them with more accurate maps constructed from air photographs. Where air photographs have not been taken it will be necessary to survey the glacier by conventional methods, but this will not be a task of a field party based at the glacier. However, it is desirable for crew members to become familiar with the area to help in surveys carried out by a visiting party. Vantage points overlooking large parts of a glacier should be marked in a manner so that they can be identified on vertical

photographs. Furthermore, if photography is expected during the same summer an additional number of key positions on the glacier should be marked (see below).

2. Selecting fixed points

Points on bedrock or on stable ground overlooking large parts of a glacier and a number of other points should be selected. Access to these fixed points should not be too difficult but in special cases it will be necessary to locate a fixed point on a mountain peak. If crew members visit such a point they should build a cairn on the first possible occasion and mark it with a flag mounted on a vertical pole (aluminum poles for this purpose will be available at the camp). If the mountain peak is very steep and undoubtedly the highest point within an area of several hundred metres' radius, it is not necessary to mark this point further with cairn or flag. For all other points, however, it is necessary to mark them so that they will be clearly visible on air photographs (see below) and can be easily identified and used for ground triangulation.

3. Marking fixed points

Pieces of white cloth one yard in width and at least 5 yards in length should be placed in an L with the inner corner of the L at the selected point. White paint is better than cloth, and it could be applied in a similar pattern on the ground. If bedrock is not exposed it is acceptable to move boulders into some suitable pattern. Note however, that when the painted area is seen from above it should form a continuous white surface. Approximately 2 quarts of white paint are required to make one such mark.* In places where space does not allow an L to be marked on the ground another pattern might be used such as a triangle or a square. Note however, that in the air photographs a painted mark can easily be mistaken for a natural spot so any shape

*When the ground is painted for aerial photography it is advisable also to paint the top of the cairn so that it can be more easily recognized.

selected should not be natural. (The L shaped mark described above is probably the least natural shape).

4. Marking points on the glacier

It would be of great value if the main stakes or at least the most important are marked so that their position can be directly recognized and plotted from air photographs. Prior to air photograph the following procedures should make stakes visible on the photographs:

a) On the glacier ice:

Stakes on the glacier ice will normally not be visible on the air photographs unless taken from a low altitude. Large flags however, might be visible on photographs and therefore it is recommended that large pieces of cloth be attached to each main stake. If the glacier is very dirty a white flag should be used; if the glacier ice is comparatively clean a dark colour should be used. Either the flag itself or its shadow (or both) might then be recognized on the photographs.

To facilitate recognition of stakes their locations might be indicated by two rows of boulders placed at the glacier ice radiating in straight lines out from the stake. The directions should be chosen so that they do not coincide with the natural ice pattern (cracks, crevasses, bluebands, surface streams, etc.).

Due to surface melt it will be difficult to keep all the rocks in the right position for a long time and adjustments must be made frequently. It is therefore advisable not to try and mark too many stakes in the ablation area. It is better to mark one or two and keep the markings in good shape throughout the summer.

b) In the accumulation area:

Locations of stakes in the firn area are marked by powdered dye or lampblack distributed on the snow surface in a circle around the stake. A circle is established

by means of a 10-metre rope attached to the stake. The dye powder is sprinkled in the circle making a very thin layer approximately 1 m broad. Two to three pounds of lampblack or about 5 pounds of powdered dye will be sufficient to make a complete ring. If time is short or only limited amounts of dye are available a half circle may be sufficient.

During the summer dye will increase the snow melt but it will still be clearly visible from above except when it is covered by new snow. The rings must therefore be inspected and reinforced during the summer and kept visible until it is certain that air photographs have been taken. No dye should be sprinkled near the stake as this will disturb the normal rate of ablation at the stake.

5. Supplementary ground control

As a horizontal check for the scale in the map construction at least two distances between outstanding points should be measured with a tape. The distance can be measured between two stakes that are marked with dye in the firn area, or between two points near the glacier tongue. (Large, single rocks on the glacier, a hut or similar outstanding features on the ground might be used). The horizontal distance, at least 200 m, should be measured as accurately as possible and all information about the selected points and the results of the measured distance should be recorded.

ERECTING AN A-FRAME HUT

1. General

At glaciers where a series of long-term observations is anticipated, small semi-permanent buildings will be erected. These buildings will be of two types:

- 1) houses for accommodation
- 2) garages, or buildings for storage etc.

Houses for accommodation, normally insulated buildings made from prefabricated material, are not described in this manual. The second type of buildings will normally be erected in the field by the crew and some hints may help in construction. The house is as simple as possible to make it easy for unskilled personnel to erect the building. The original design is by Mr. Vibjörn Karlén who built similar houses with and without insulation. The uninsulated type will be sufficient for storage and this hut is described below.


2. Basic construction

In principle the house is a simple A-shaped building with no side walls, only two triangular end walls and a large roof. The end walls, the roof and the floor consist of a single layer of wooden planks (approximately 1" thick and 4"-6" wide; fairly rough wood can be used for walls and roof). The basic construction consists of 2" x 4" joists and rafters which are nailed together in a triangle. The roof and the floor are then nailed directly on this construction. The floor is nailed on the inside, the roof and end walls on the outside of the basic framework.


3. Foundation

A plane surface is necessary to support a foundation of 4" x 4" lumber. At least 2 pieces of 4" x 4" beams should be used as foundation but 3 or 4 pieces are recommended as they will give better support to the floor joists, especially if a heavy load is expected (a skidoo or other heavy equipment).

The foundation should be placed at a site that is usually snow-free during the winter. Otherwise the building might be partly or completely covered by snow for long periods and the use of it hindered. The 4" x 4" lumber should be placed parallel to each other and levelled at the spot selected for the house. The floor joists joined to the roof rafters (thus forming a wooden triangle, see sketch), should then be raised vertically, resting on the foundation at right angles.

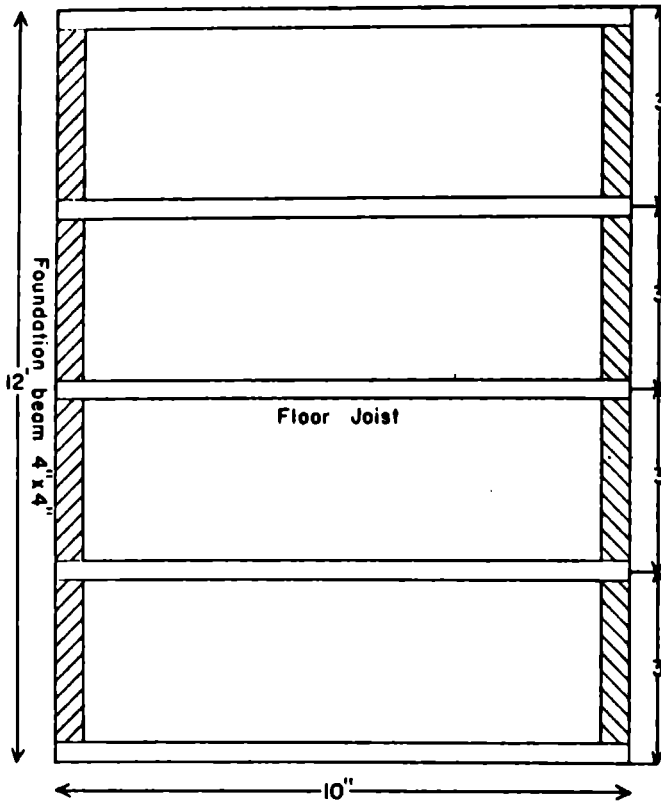

A - FRAME HUT
FRAMEWORK

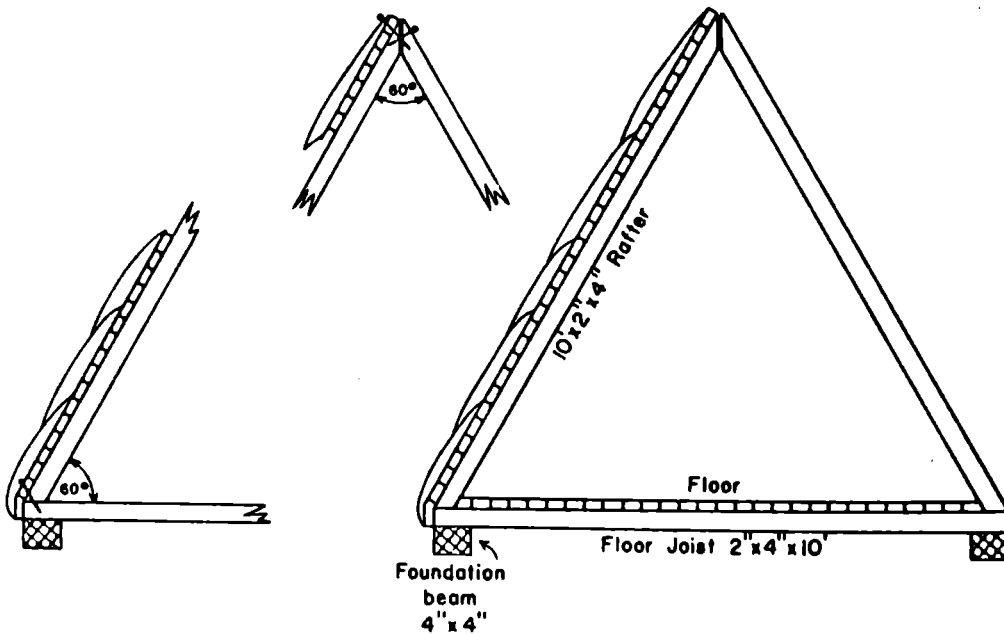

4. The framework

The 2" x 4" framework is joined together as follows: One floor joist is placed horizontally on the ground. Two roof rafters are also placed horizontally so that they form a triangle together with the floor joists. Corners of the rafters are cut so that they can easily be nailed to the floor joists at their lower ends and nailed together at their other (upper) ends. The lengths of the rafters should be equal to the length of the floor joists thus forming a triangle with 60° angles. If a lower house is desired due to unusual wind conditions, the rafters must be shorter. A higher house can also be made but this is not recommended.

When the first triangle has been completed, the rest of the framework is made by placing pieces of lumber for the next set on top of the first constructed triangle and cutting the pieces to the same size. It is advisable to nail together the pieces of each triangle immediately. Five complete triangles should be made for an A-frame hut of normal size. However, if wood is scarce only three triangles could be sufficient, but the floor will be extremely weak and two extra floor joists would be necessary. Three roof rafters however, will normally be sufficient to carry the roof, but five rafters are recommended as they give a stronger construction.

Two of the completed triangles are selected to carry the end walls. Vertical supports for window and door should then be nailed in proper location in these triangles. Pieces of 2" x 4" lumber can be used for this support, but if lumber is scarce pieces of 2" x 2" can be used. The space between these supports will be determined from the width of the window and the door, respectively. Furthermore, for the window two horizontal supports will be necessary. These horizontal supports should be placed as high as possible; the distance between them determined by the size of the window. The upper end of the door entrance will need a horizontal beam. All these pieces of wood should be nailed to the triangular frames before they are raised on the foundation.



Preparing the framework

The 2 x 4" beams for the framework are placed on the ground to make triangles of exactly the same size. Lumber for each triangle are nailed together immediately.

When the framework is erected it is advisable to start with the two end wall triangles and distribute the three remaining triangles with equal distances between them. The triangles are then fixed to the foundation by nailing the floor joists to the 4" x 4" beams. Two long planks should immediately be placed in an "X" and attached to the roof rafters as a preliminary support. Furthermore if it is a windy day, the rafters should be supported by a rope at either end as the assembled framework is very unstable until the roof has been completed.

5. Roof and end walls

The roof consists of planks of rough lumber preferably pre-cut to the same length as the distance between the end walls or 1'-2' longer. In the latter case the house will have a better appearance and the vertical end walls will be better protected.

Roof planks should be nailed to all five rafters starting from the bottom. If the planks are pre-cut to equal length the complete roof can be laid in a couple of hours.

There will probably be a small discrepancy in height between the top of the rafters and the last (upper) horizontal plank on both sides of the roof. As it is difficult to split a wooden plank to desired width in the field it is recommended to:


1) either adjust the distance between the last planks laid on the upper part of the roof so that the edge of the top plank will just run along the top of the rafters. The small distance made between the upper planks will not make the construction significantly weaker as a base for the roofing paper.

2) or cut the upper part of the steep edge on the rafters and place a 1" x 1" rod along the edge. The roof will then obtain a somewhat rounded surface along its highest crest, which might be better than a sharp edge.

The side walls are made in a similar manner as the roof, but each plank must be cut at a 60° angle to make a good join with the roof. Sufficient space must



From erection of the A-frame house at Woolsey Glacier 1965
Only three rafters were used for this hut and the picture shows the situation when the roof is being attached. Note that the roof will be extending one foot outside the end walls on either side.

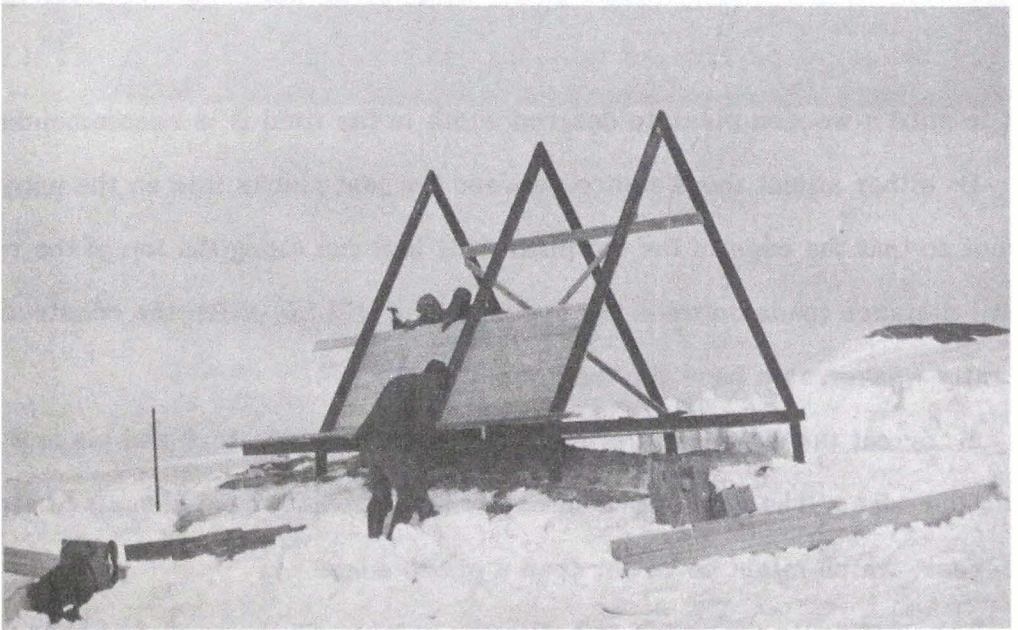

In this case it was decided to have an inner roof and this is being nailed to the rafters before the outer roof is laid. A layer of insulation (rockwool or similar) will make the hut much warmer. A similar layer of insulation is of course also placed in the floor and the end walls.

be provided for door and window. It is recommended that the end walls be covered with heavy roofing paper, and the walls can therefore be made of fairly rough lumber. It is advisable to pre-cut planks for the end walls to save transportation costs and save time when the house is erected. Note, however, that every piece must be numbered properly.

6. The floor



The best floor is made of 1" to 1 1/2" planks with tongue and groove to ensure a draft-free floor surface and to allow the planks to support each other when a heavy load is applied. Even these planks could be pre-cut to equal length but due to the framework construction it will be necessary to adjust the lengths of some of them so they fit properly inside the house. Some hints for construction details (note especially the corners where roof and floor meet) are shown among the illustrations.

7. Door and window


As the house is primarily made as a shelter for supplies or as a garage for a skidoo it is not expected that it should be completely air-tight. Therefore it is not necessary to make a complicated door construction. The easiest way to make a door is to use a sheet of heavy plywood or a number of planks which are nailed together. The size of the door must fit the opening made in the vertical front wall and it should be mounted by three hinges. Two ordinary hooks can be used to close the door, one on each side. If the door is made of plywood it is important to paint it properly to avoid damage caused by moisture.


The window can be any kind of wooden frame window which is squeezed into the opening provided for in the other end wall. To obtain a tight connection between the window and frame use a caulking compound, or sheets of aluminum cut in suitable strips.

A-FRAME HUT END WALLS AND PERSPECTIVIC SKETCH

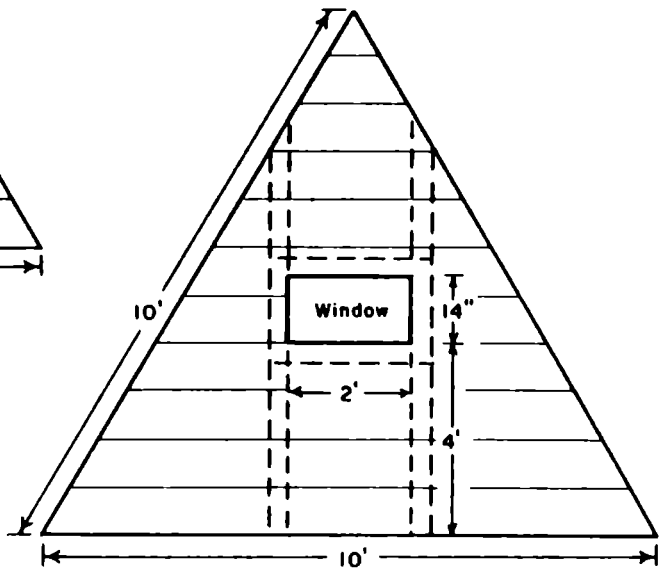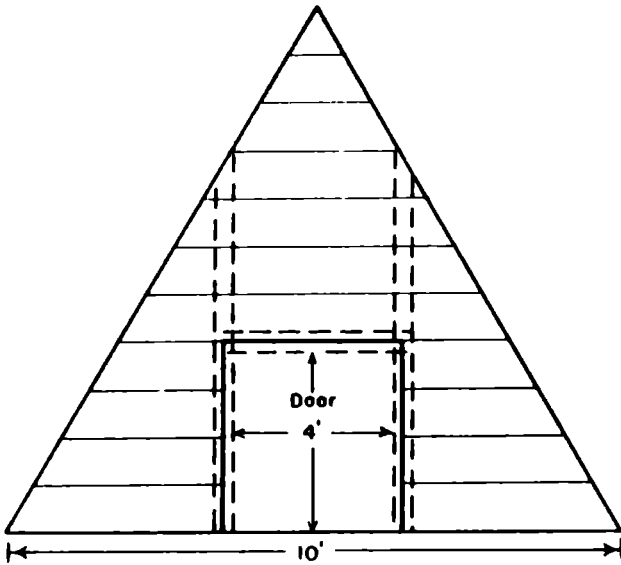


NOTE: Size of door is sufficient for a ski-doo, but it might be made higher if hut is considered for accommodation.

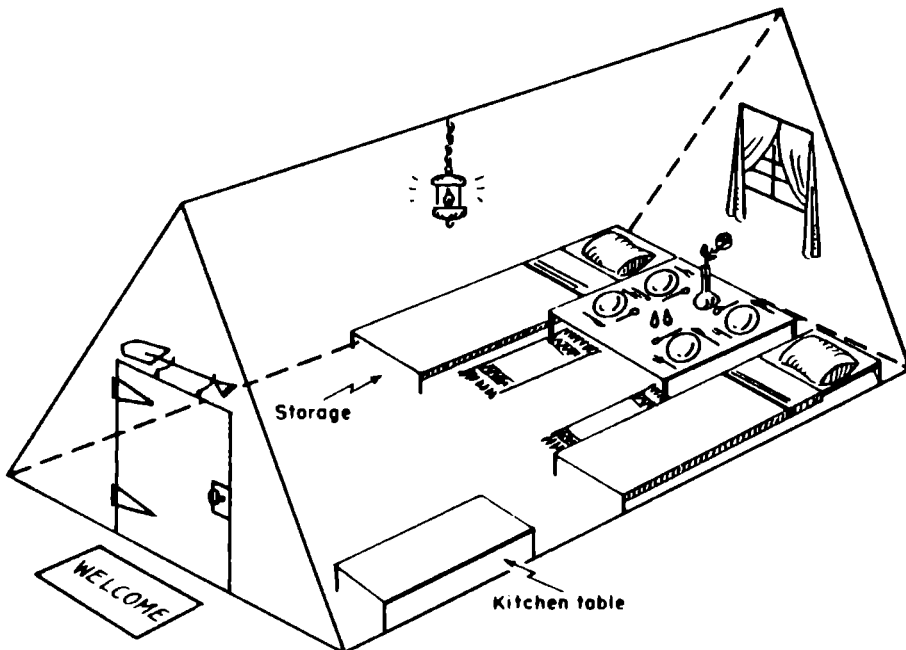

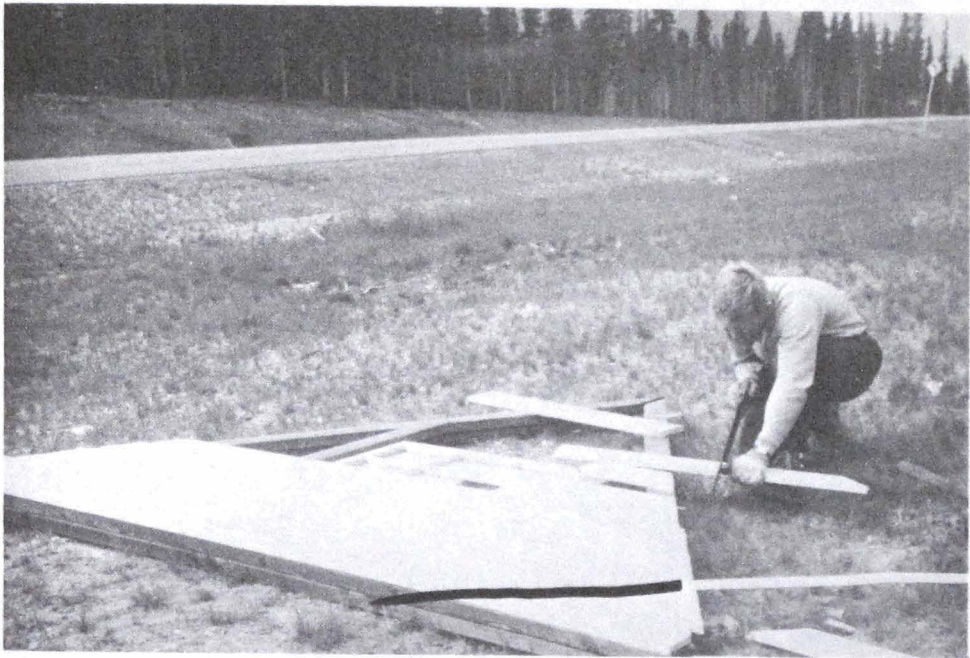


Precutting the end wall cover

To save transportation costs and time when the house is erected at the glacier it is recommended to pre-cut all the planks for the end walls. The picture shows a part of the A-frame hut erected at Ram River Glacier 1965.

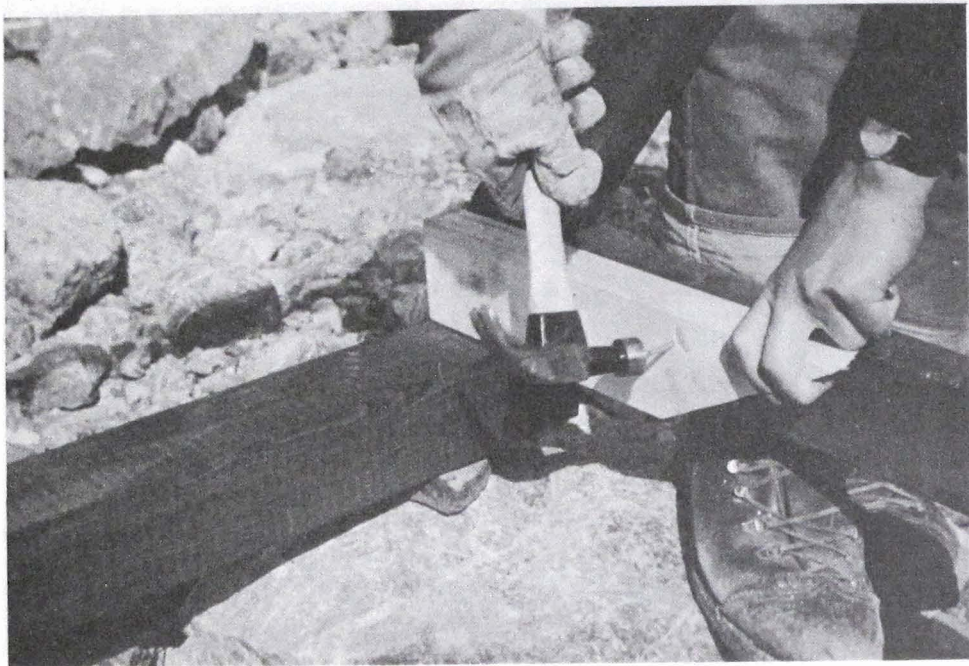

Detail of the framework construction

The picture shows a part of the foundation (beam resting on the rock) and a corner of the end wall triangle placed in its final position. A short piece of 2 x 4 lumber is nailed on this triangle to support the floor plank that has to be placed between rafters inside the hut. It is difficult to get a good connection between roof and floor unless such supports are mounted before the floor is completed.

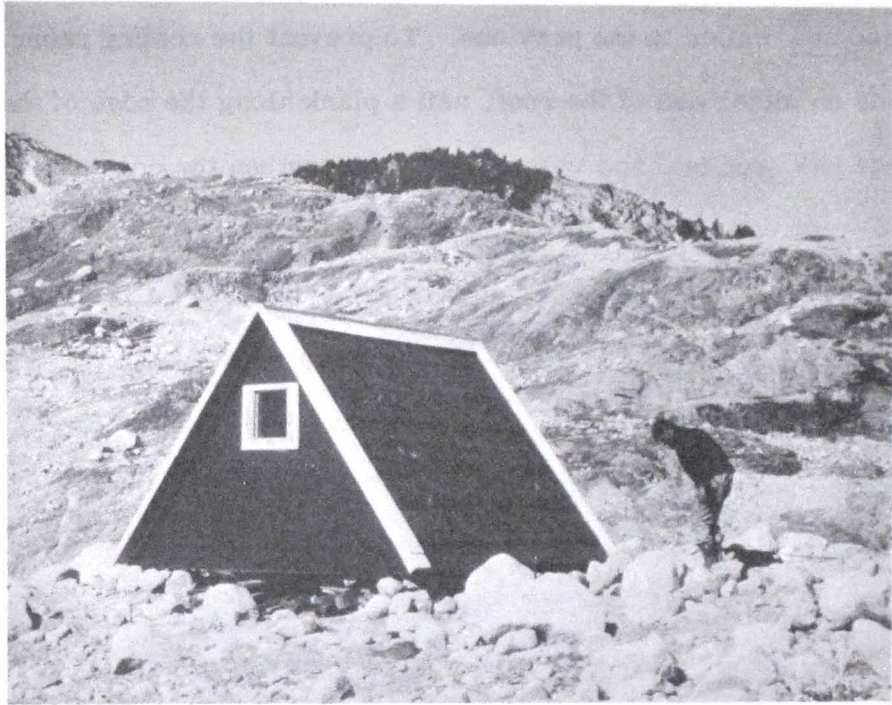

The completed skidoo garage at Place Glacier, Birken, B. C.
The roof and the end walls were covered by black roofing paper. The plank along the edge of the roof and the window frame painted white. The picture was taken before the guy wires were attached.

8. Outside cover, paint, etc.

To waterproof a hut the roof and the end walls must be covered with roofing paper and only the best quality should be selected. This is heavier than other kinds but it will last for several years if applied properly.

To cover the roof start at the lower edge and nail a horizontal strip to the roof or to the foundation. The following strip should overlap the lower strip and if possible be glued and nailed to the previous. To prevent the roofing paper being torn off by high winds on either end of the roof, nail a plank along the edge of the roof after the roofing paper has been laid and trimmed. To strengthen the edge along the top of the roof apply a strip of aluminum or galvanized steel on the roofing paper.

End walls should be covered by roofing paper in a manner similar to the roof but it is not necessary to cover the door if it is thoroughly painted.


Before painting the wood that is not covered by roofing paper it is recommended to apply 1" x 1" (either square or quarter round) flashing material along all outside and inside corners. This will prevent snow from drifting into the hut during the winter and also decrease the draft.

9. Guy wires

The house must be anchored to the ground with wire cables or guy lines. Ideally, the cables are fastened to steel bolts drilled into bedrock near the corners of the house. However, if it is impossible to drill holes, or the ground consists of moraine material with no exposed bedrock, dig a hole, attach wires to a big rock and drop it into the hole. Fill the hole up again with gravel and pile some big rocks on top. The wire attached to the buried boulder should be long enough to form a loop 20-50 cm above the ground. The guy wires are then attached to this loop and tightened with a turnbuckle.

One heavy guy wire across each end of the roof will normally be sufficient. But if strong winds are expected normal to the end walls, additional guy wires could

Support for guy wires in cases where the bedrock is not exposed Steel wires were tied to a boulder that was placed in the bottom of a pit dug in the ground. The picture shows a loop of this wire before the pit is completely filled up with gravel. The guy wire will be attached to this loop and tightened by means of a turnbuckle.

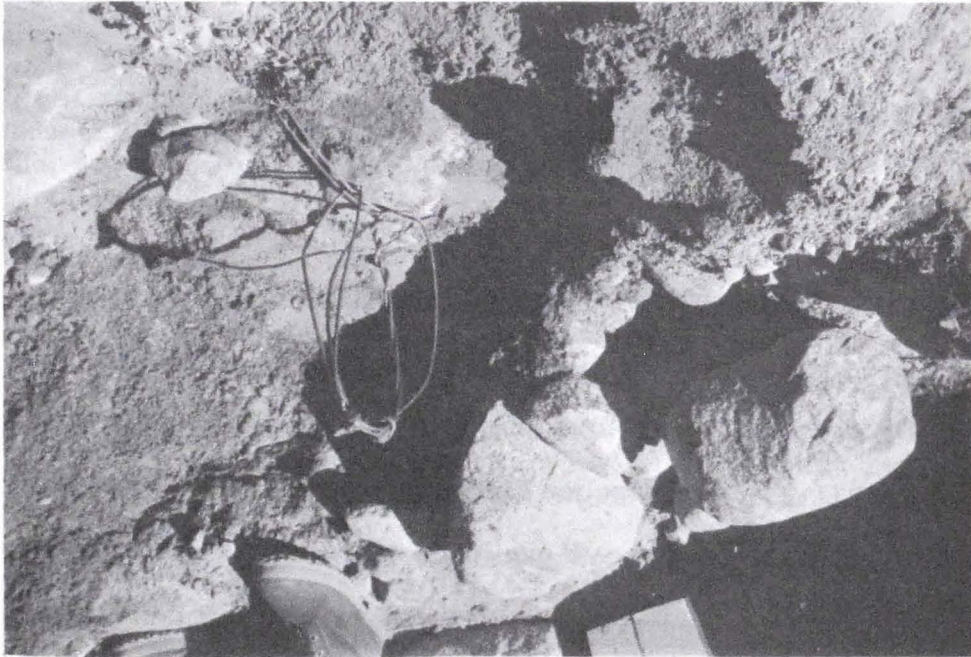

be fixed at the top of the end walls. To tie such wires to the roof rafters a small hole must be made in the wall.

10. Materials necessary for one complete hut

The size of the hut depends on its purpose. As a shelter for a skidoo a 10' x 12' floor surface will be sufficient, and this size has been selected for the A-frame huts constructed at glaciers in western Canada. This size will also be ample for occasional use as accommodation for 2-3 people. Total cost of materials depends upon quality of lumber and location where materials are purchased. The estimated cost in 1966 for all necessary material is \$100-200.

Materials necessary for a complete hut are given in the list below but paint and materials for shelves, tables, beds, etc. have not been included. The length of the guys will depend on local conditions but 150 feet should probably be sufficient for most huts.

Lumber, nails and roofing paper for one single walled A-frame hut amounts to:

For roof: 1" planks, rough wood (grade 2 or 3)	300 sq. ft.
For front and end walls: 1" planks rough wood (grade 2 or 3)	150 sq. ft. = total 450 sq. ft.
For floor: 1" or 1 1/4" tongue & groove (grade 2 or 3)	140 sq. ft.
Floor joists	5 lengths 2" x 4" x 10'
Rafters	10 " 2" x 4" x 10'
Door and window supports	4 " 2" x 4" x 8'
Door, plain 3/4" plywood	4' x 4'
Finishing rod 1/4 round	140 linear ft.
Roofing paper	5 rolls (90 lbs. a roll)
Roofing nails 7/8" galvanized	8 lb. box
Nails (1000) 2" (gum nails, box coated)	5 lbs.
Nails (300) 2 1/2" (gum nails, box coated)	3 lbs.
Hinges for door	3 pieces + screws
Door hooks and eyes	2 sets
Foundation	2 lengths 4" x 4" x 12'
	2 " 4" x 4" x 12'
Guy wire, turnbuckles, cable clamps	and if possible quantity to be decided in each case, according to local conditions.

Experience has shown that this simple A-frame hut can be erected by 2 men in less than 2 days. The total weight of all necessary materials amounts to approximately 2,500 pounds.

DUTIES AT THE END OF THE SUMMER FIELD SEASON

1. General

Many different glaciers will be investigated throughout the coming years and it is obvious that a large volume of data will be accumulated in these investigations. Some of the data has to be processed in the field so that results of mass balance, meteorological data etc. can be published without delay.

The staff at the Glaciology Section in Ottawa will handle many lists of data and to avoid confusion it is essential that all sheets of paper are marked with the name of the glacier and the year. In addition each individual sheet must have some sort of title and the work initialed in the bottom right hand corner.

e. g. Place Glacier 1966

Snow Pit Measurements

The senior crew member will be held responsible for marking sheets with the full title.

At the end of the field season he will:

- a) Leave at the glacier (in the hut) a copy of a map showing all stake locations together with a list of the last readings (as made before leaving the glacier)
- b) Check that all data are adequately tabulated and summary forms are completed.
- c) Ensure that all records reach Ottawa safely (not sent by mail or included with equipment that is sent as luggage).

2. List of data sheets and summaries

The following records and summaries must be handed in as soon as possible after return from the field:

1. **Brief diary showing date and work accomplished.**

Example: June 6 Arrive Lake Louise
June 7 Arrive glacier, ferry supplies, helicopter
2 hours. (Flight report to be enclosed).
June 8 Read all stakes, on lower part of glacier,
sorted supplies.

2. **Summaries of daily meteorological observations including:**

- a) Daily mean temp. (centigrade)
- b) Positive degree days (centigrade)
- c) Rainfall (in mm's)
- d) Mean cloudiness (in 10ths)

Note: Standard forms should be used and the columns between those with headings should be left blank for they will be used in later calculations of sub-totals for selected periods, etc:

- 3. A table to show dates when each stake has been read throughout the whole season. (Use standard form).
- 4. Stake forms completed in all respects. The cumulative ablation must be clearly indicated for each single stake.
- 5. Table of river discharge - to show daily discharge in sub-totals. Total water volume to be calculated from 0000 to 0600 hrs; 0600 to 1200, 1200 to 1800, and 1800 to 2400 hrs; as well as each day's total water discharge.
- 6. Snow pit measurements - completed standard forms, and graphs showing density and water equivalent vs. depth for each pit.
- 7. A list of all equipment and supplies remaining at the hut (standard list).
- 8. A list of all equipment and supplies returned to Ottawa (standard list).
- 9. When applicable: Report of losses of equipment (Departmental form).
- 10. Statement of disbursements (on printed forms) together with all receipts arranged chronologically, neatly glued or stapled on 8 1/2" x 11" size sheets of blank paper.

3. **Closing the station**

The base camp must be left tidy and in good order. All personal belongings that are not brought back must be burned or dug down as all other garbage. Remaining food supply should be checked for items that could deteriorate during the fall and winter, and such items removed.

A list of supplies and a sketch showing location of gas barrels etc. must be left in the house. Stakes, stake extensions (2 m pieces), extension tubes (steel) and masonite plates must be placed so that they will be readily accessible during the winter.

All batteries that have been used (or partly used) must be thrown away. Only unused batteries should be left, and must, always be placed in a plastic bag - never left in radios, flashlights or in other equipment ! Such batteries should be marked "New 1966 - unused".

The station will probably be visited several times during the winter, and as an emergency measure a stove and limited supplies of fuel and food must be left in the garage. The garage will normally not be locked.

A shovel must be placed on the outside wall above the door on all houses, and fuel for lightning, cooking and for the ski-doo be left in handy containers inside.

APPENDIX

a) Standard Forms

The following sample collection consists of standard forms for:

- Winter stake readings and stake extensions
- Snow pit measurements
- Representative core drill measurements
- Stake observations
- Daily meteorological observations
- Daily temperature corrections and daily means
- Summary of daily meteorological observations
- Stream gauge recordings
- Stream discharge calculations
- Silt sample data
- Altimeter readings and corrections
- Air temperature correction tables for altimeter.

b) Short description of ashing procedure

This ashing procedure has been tried out in the Geographical Institutions at the Universities of Uppsala and Stockholm, Sweden. During the last several years many thousands of silt samples from glacier streams etc., have been processed according to the points mentioned below. Comparisons have also been done with other methods such as filtrating and drying the material in the field by means of membrane filter and suction pumps. As the material in that particular case was obviously free from organic matter the comparison showed good agreement with the ashing procedure.

The water samples should be taken either with a specially designed water sampler (in case of laminary streaming water) or with a simple bottle of known volume (in cases of extremely turbulent water). If river is low, a larger sample should be taken. The following procedure should then be followed.

1. 1 litre (or another known volume) of the river water should be filtrated by means of a quick filtrating funnel and filtrating paper Munktell No. 00. In cases when very fine particles are expected the denser paper, Munktell No. OA should be used.
2. The filtrating paper should be removed from the funnel and partly dried in the air. Observe however that no dust adds to the content.
3. The filtrating paper should be folded and put in a plastic bag and then placed into an envelope for transportation. The number of the sample as well as the particulars concerning sampling time etc., should be noted on the outside of the envelope.
4. The laboratory work starts with weighing a number of empty porcelaine crucibles together with their lids. The filtrating papers should be placed one in each cup.
5. By means of a Bunsen burner the crucible should be heated carefully so that the paper starts burning. To facilitate the smoke to escape the lid should be placed so that it only partly covers the crucible.

6. After this procedure, i. e. when the smoke has nearly completely ceased to form, the crucibles should be placed in the ashing oven, the lids covering the crucibles completely. The optimal temperature of the oven is approximately 550°C.
7. After 2 hours the crucibles should be transferred to a drying oven and kept at 100°C for half an hour.
8. The crucibles should then be placed in a dessicator for half an hour and from this they are moved one by one onto the scale and weighed as quickly as possible as the moisture in the air will immediately change the weight of the dry ash. As a test for possible errors originating from humidity some of the crucibles could be moved back to the drying oven and the procedure should start again according to point 7. An error no larger than 0.2 mg could be accepted. It is important that each empty crucible should be weighed each time it is used, as the weight varies almost continuously due to humidity changes.
9. The ash should then be removed from the crucible which is then weighed empty in order to check that it has not changed its original weight. (see point 4). The removal of the ash can easily be done with a dry brush.

Note: It is advisable always to "burn" all new crucibles before they are used in this analysis as they will normally change their original weight.

If the oven temperature rises above the mentioned temperature carbonates will easily start to decompose and a too small silt content might be obtained by this analysis. On the other hand if the temperature is too low some organic components will not be removed from the samples. However, in the case of samples taken close to a glacier there should not be large risks of having too much organic material in the sample.

REFERENCES AND RECOMMENDED LITERATURE

Ahlmann, H. W.

- 1948 : Glaciological research on the north Atlantic coasts. Roy. Geogr. Soc. Research Series 1 (83 p.).
- 1953 : Glacier Variations and Climatic Fluctuations. Bowman Memorial Lectures, Series three. American Geographical Society, New York, (51 p.).

Ambach, W.

- 1961 : Die Bedeutung aufgefrorenen Eises (superimposed ice) für den Massen- und Energiehaushalt eines Gletschers. Zeitschr. für Gletscherkunde und Glazialgeologie, Bd. 4, 169-189.

Benson, C. S.

- 1962 : Stratigraphic studies in the snow and firn on the Greenland ice sheet. SIPRE Research Report 70, (93 p. plus appendix)

Danfors, E., Fleetwood, A. and Schytt, V.

- 1962 : Application of the neutron scattering method for measuring snow density. Geogr. Ann., v. 44, 409-411.

Dodd, J. R., Cain, J. A., Bugh, J. E.

- 1965 : Apparently significant contour patterns demonstrated with random data. J. geol. education, v. 13, no. 4, 109-112.

Fahnestock, R. K.

- 1963 : Morphology and hydrology of a glacial stream - White River, Mount Rainier, Washington. U.S. Geol. Surv. Professional Paper 422-A (70 p.).

Hjulström, F.

- 1935 : Studies of the morphological activity of rivers as illustrated by the River Fyris. Bull. geol. inst. Upsala, v. 25, 221-527.

Hoinkes, H.

- 1955 : Measurements of ablation and heat balance on Alpine glaciers. J. Glaciol., v. 2, 17, 497-501.

Hubley, R. C.

- 1957 : Analysis of surface energy during the ablation season on Lemon Creek Glacier, Alaska. Trans. Am. Geophys. Union, v. 38, 68-95.

Kamb, B.

- 1964 : Glacier Geophysics. Science, v. 146, 353-365.

LaChapelle, E. R.

- 1959 : Errors in ablation measurements from settlement and sub-surface melting. J. Glaciol. v. 3, no. 26, 458-467.
- 1961 : The ABC of avalanche safety. Highlander Publ. Co., Boulder, Colo. (47 p.).

LaChapelle, E.R.

- 1965 : The mass budget of Blue Glacier, Washington. J. Glaciol., v. 5, 41, 609-623.

Langway, C. C. Jr.

- 1962 : Some physical and chemical investigations of a 411 metre deep Greenland ice core and their relationship to accumulation. IUGG, Int. Ass. of Sci. Hydrology, Symposium of Oberurgl, Publ. No. 58, pp. 101-118.

Leighty, R. D.

- 1966 : Snow density profiling by nuclear means. J. Glaciol. v. 6, no. 43, 171-176.

Lliboutry, L.

- 1964 : Traité de Glaciologie, v. 1 & v. 2 (1965). Masson & Cie. Paris. (1040 p.)

Manning, H.

- 1962 : Mountaineering, the freedom of the hills. The Mountaineers, Seattle, Wash. (430 p.)

Marnier, W.

- 1963 : Mountain rescue techniques. Innsbruck. (200 p.). Distr. by the Mountaineers, P. O. Box 122, Seattle, Wash. 98111. (Price \$3.50).

Meier, M. F.

- 1962 : Proposed definitions for glacier mass budget terms. J. Glaciol. v. 4, 33, 252-261.

- 1965 : Glaciers and climate, in: The Quaternary of the United States, VII Congress of the International Association for Quaternary Research, (Review Volume (922 p.) edited by H. E. Wright Jr. and D. G. Frey, Princeton Univ. Press, 795-805).

Müller, F.

- 1962 : Zonation in the accumulation area of Axel Heiberg Island, N.W. T., Canada. J. Glaciol. v. 4, no. 33, 203-310.

Østrem, G.

- 1964 : A method of measuring water discharge in turbulent streams. Geogr. Bull., no. 21, 21-43.

- 1966 : Mass balance studies on glaciers in Western Canada, 1965. Geogr. Bull., v. 8, 1, 81-107.

Schytt, V.

- 1949 : Refreezing of the melt water on the surface of glacier ice. Geogr. Ann., v. 31, 222-227.

Sharp, R. P.

- 1954 : Glacier flow: a review. Geol. Soc. of America, Bulletin v. 65, 821-838.

Sharp, R. P.

- 1960 : Glaciers. Condon Lectures, Oregon State System of Higher Education. University of Oregon Press (78 p.).

Shumskii, P. A.

- 1964 : Principles of structural glaciology. (Translated from Russian by David Kraus) Dover Publications, Inc. New York (497 p.).

SIPRE

- 1954 : Instructions for making and recording snow observations. SIPRE Instruction manual 1 (23 p. mimeo).

Tangborn, W. V.

- 1963 : Instrumentation of a high altitude glacier basin to obtain continuous records for water budgets; a preliminary study. I. U. G. G. Int. Ass. of Sc. Hydrology, Symposium of Berkeley, Publ. No. 61, 131-137.

U. S. Dept. Agriculture

- 1961 : Snow avalanches; A handbook of forecasting and control measures. Agricultural handbook no. 194. (84 p.)

Wallén, C. C.

- 1948 : Glacial-meteorological investigations on the Karsa glacier in Swedish Lapland 1942-1948. Geogr. Ann., v. 30, 451-672.

Williams, D. A.

- 1964 : Accuracy of field snow surveys in Western United States including Alaska. U. S. Dept. of Agriculture, Soil Conservation Service. (59 p. mimeo.). See also Work, R. A. et al 1965.

Work, R. A. , Stockwell, H. J. , Freeman, T. G. , and Beaumont, R. T.

- 1965 : Accuracy of field snow surveys, Western United States, including Alaska. CRREL Tech. Report 163 (43 p.).

SOME STATISTICAL CONSIDERATIONS

by

W.J. Campbell

(U.S. Geol. Survey, Tacoma, Wash.)

The observations of accumulation and ablation are some of the most fundamental in glaciology, yet considerable disagreement concerning the accuracy of these measurements exists in the literature. Some investigators feel that a certain number of stakes per given area must be fixed, as a kind of statistical constant, in order to obtain measurements of sufficient accuracy, but such a concept fails to allow for the vast topographic variations that occur on glaciers. For example, one stake in central Greenland might be representative for hundreds of square kilometers, whereas a stake on a valley glacier might be representative for a few square meters. Other investigators feel that the individual glacier under consideration must determine the number and array of stakes used. Although more pleasing in an intuitive physical sense than the fixed stake per area concept, this philosophy of measurement confronts the investigator with the great problem of determining the density of his observation network.

Any practical method of field measurement of accumulation and ablation must be composed of an intuitive as well as a statistical methodology. The intuitive skill is obtained only by much experience with the glaciers being measured, thus we cannot talk about it. The statistical aspects can be discussed, but one must bear in mind that in reality they must be combined with intuition in order to yield valid results.

The enclosed graph allows one to determine the number of observations necessary to obtain a representative mean, if the individual

observations fit a normal probability distribution. First, the standard deviation of a number of observations, for example the ablation measurement of a number of stakes in a certain area of uniform ablation on a glacier, is computed. Alternatively, if an experiment is being planned, some information on the expected standard deviation might be obtained from other experiments. The standard deviation is defined

$$\delta = \sqrt{\frac{\sum(a - \bar{a})^2}{N}} \quad \text{where } a \text{ is}$$

the individual measurement value, \bar{a} is the arithmetic mean of the observations, and N is the number of observations, or in this case the number of stakes. The arithmetic mean is considered to be representative if it differs, with a predetermined probability P , not more than x from the true mean. Generally x and P are fixed according to the requirements of the study, and δ may be fixed by the inherent dispersion of point-values on the glacier.


With a given δ and a chosen x the point on the chosen probability curve whose ordinate is x/δ can be found, and the abscissa of this point is then the number of observations, or stakes, necessary. Of course, this says nothing about the array of observations, but in order for the statistics to be valid it is necessary that the area in question on the glacier be covered. The array design demands intuitive insight, since it is probable that δ will not only vary considerably from glacier to glacier but will vary from one part of the glacier to another.

The graph may be used in two ways. As above it can be used to estimate the density of an observational network necessary for a desired accuracy. The graph can also be used to find the accuracy for a given set of observations. For example, suppose 30 ablation stakes gave

measurements with a standard deviation of 2.0. Suppose also that one desired a probability of 99 percent that the arithmetic mean was representative of the true mean. The point on the 99 percent P-curve whose abscissa is 30 is then located and the ordinate is read as 0.5. The accuracy of the determination of the mean value is then

$$x = \sigma(0.5) = 2(0.5) = 1 \text{ centimeter}$$

This method affords an objective way of estimating the accuracy of one's measurements as well as a check on the density of the observation network. Of course, it is useful only after some observations have been made, thus it is of little help in the initial design of an observational network. However, it can be most helpful in the modification of existing networks to make these more accurate.

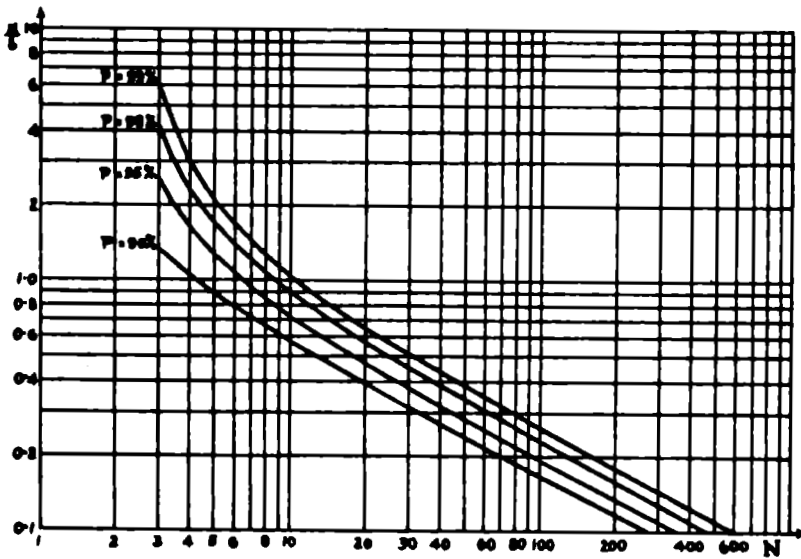

Graph for determination of number of single values (N) necessary to obtain a representative arithmetic mean.

Winter Stake Readings and Stake Extensions

Glacier

Day

Month

Year

Stake No.	Measured length above snow surface	Stake extended to (cm above snow surface)	Extension tube marked with no.	Sounded snow depth at stake (cm)	Remarks (flag etc.)

SUMMARY OF DAILY METEOROLOGICAL OBSERVATIONS

Location of met. screen.....

Elevation.....

Date	Temp °C	Sub Totals	Degree Days	Sub Totals	Cloudiness in 10's	Rainfall m.m.	Sub Totals
1							
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							

SIGNATURE.....

Average Air Temperature Correction in Feet

For temperatures above 50° F. the values are to be added
 For temperatures below 50° F. the values are to be subtracted

Average air temp. °F.		Difference of readings in feet														Average air temp. °F.	
		0	20	40	60	80	100	120	140	160	180	200	220	240	260		
	+50°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	+50°	
+48°	+52°	0	0.1	0.2	0.2	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.9	1.0	+52°	+48°	
+46°	+51°	0	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.4	1.6	1.7	1.9	2.0	+51°	+46°
+44°	+56°	0	0.2	0.5	0.7	0.9	1.2	1.4	1.6	1.9	2.1	2.4	2.6	2.8	3.1	+56°	+44°
+42°	+58°	0	0.3	0.6	0.9	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.5	3.8	4.1	+58°	+42°
+40°	+60°	0	0.4	0.8	1.2	1.6	2.0	2.4	2.7	3.1	3.5	3.9	4.3	4.7	5.1	+60°	+40°
+38°	+62°	0	0.5	0.9	1.4	1.9	2.4	2.8	3.3	3.8	4.2	4.7	5.2	5.7	6.1	+62°	+38°
+36°	+61°	0	0.5	1.1	1.6	2.2	2.7	3.3	3.8	4.4	4.9	5.5	6.0	6.6	7.1	+61°	+36°
+34°	+66°	0	0.6	1.3	1.9	2.5	3.1	3.8	4.4	5.0	5.7	6.3	6.9	7.5	8.2	+66°	+34°
+32°	+68°	0	0.7	1.4	2.1	2.8	3.5	4.2	4.9	5.7	6.4	7.1	7.8	8.5	9.2	+68°	+32°
+30°	+70°	0	0.8	1.6	2.4	3.1	3.9	4.7	5.5	6.3	7.1	7.9	8.6	9.4	10.2	+70°	+30°
+28°	+72°	0	0.9	1.7	2.6	3.5	4.3	5.2	6.0	6.9	7.8	8.6	9.5	10.4	11.2	+72°	+28°
+26°	+74°	0	0.9	1.9	2.8	3.8	4.7	5.7	6.6	7.5	8.5	9.4	10.4	11.3	12.3	+74°	+26°
+24°	+76°	0	1.0	2.0	3.1	4.1	5.1	6.1	7.1	8.2	9.2	10.2	11.2	12.2	13.3	+76°	+24°
+22°	+78°	0	1.1	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	12.1	13.2	14.3	+78°	+22°
+20°	+80°	0	1.2	2.4	3.5	4.7	5.9	7.1	8.2	9.4	10.6	11.8	13.0	14.1	15.3	+80°	+20°

+18°	+82°	0	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.3	12.6	13.8	15.1	16.3	+82°	+18°
+16°	+84°	0	1.3	2.7	4.0	5.3	6.7	8.0	9.4	10.7	12.0	13.4	14.7	16.0	17.4	+84°	+16°
+14°	+86°	0	1.4	2.8	4.2	5.7	7.1	8.5	9.9	11.3	12.7	14.1	15.6	17.0	18.4	+86°	+14°
+12°	+88°	0	1.5	3.0	4.5	6.0	7.5	9.0	10.4	11.9	13.4	14.9	16.4	17.9	19.4	+88°	+12°
+10°	+90°	0	1.6	3.1	4.7	6.3	7.9	9.4	11.0	12.6	14.1	15.7	17.3	18.9	20.4	+90°	+10°
+8°	+92°	0	1.6	3.3	4.9	6.6	8.2	9.9	11.5	13.2	14.8	16.5	18.1	19.8	21.4	+92°	+8°
+6°	+94°	0	1.7	3.5	5.2	6.9	8.6	10.4	12.1	13.8	15.6	17.3	19.0	20.7	22.5	+94°	+6°
+4°	+96°	0	1.8	3.6	5.4	7.2	9.0	10.8	12.6	14.5	16.3	18.1	19.9	21.7	23.5	+96°	+4°
+2°	+98°	0	1.9	3.8	5.7	7.5	9.4	11.3	13.2	15.1	17.0	18.9	20.7	22.6	24.5	+98°	+2°
0°	+100°	0	2.0	3.9	5.9	7.9	9.8	11.8	13.7	15.7	17.7	19.6	21.6	23.6	25.5	+100°	0°
-2°	+102°	0	2.0	4.1	6.1	8.2	10.2	12.3	14.3	16.3	18.4	20.4	22.5	24.5	26.6	+102°	-2°
-4°	+104°	0	2.1	4.2	6.4	8.5	10.6	12.7	14.8	17.0	19.1	21.2	23.3	25.5	27.6	+104°	-4°
-6°	+106°	0	2.2	4.4	6.6	8.8	11.0	13.2	15.4	17.6	19.8	22.0	24.2	26.4	28.6	+106°	-6°
-8°	+108°	0	2.3	4.6	6.8	9.1	11.4	13.7	15.9	18.2	20.5	22.8	25.1	27.3	29.6	+108°	-8°
-10°	+110°	0	2.4	4.7	7.1	9.4	11.8	14.1	16.5	18.9	21.2	23.6	25.9	28.3	30.6	+110°	-10°
-12°	+112°	0	2.4	4.9	7.3	9.7	12.2	14.6	17.0	19.5	21.9	24.4	26.8	29.2	31.7	+112°	-12°
-14°	+114°	0	2.5	5.0	7.5	10.1	12.6	15.1	17.6	20.1	22.6	25.1	27.7	30.2	32.7	+114°	-14°
-16°	+116°	0	2.6	5.2	7.8	10.4	13.0	15.6	18.1	20.7	23.3	25.9	28.5	31.1	33.7	+116°	-16°
-18°	+118°	0	2.7	5.3	8.0	10.7	13.4	16.0	18.7	21.4	24.0	26.7	29.4	32.1	34.7	+118°	-18°
-20°	+120°	0	2.7	5.5	8.2	11.0	13.7	16.5	19.2	22.0	24.7	27.5	30.2	33.0	35.7	+120°	-20°
-22°	+122°	0	2.8	5.7	8.5	11.3	14.1	17.0	19.8	22.6	25.4	28.3	31.1	33.9	36.8	+122°	-22°
-24°	+124°	0	2.9	5.8	8.7	11.6	14.5	17.4	20.3	23.2	26.2	29.1	32.0	34.9	37.8	+124°	-24°
-26°	+126°	0	3.0	6.0	9.0	11.9	14.9	17.9	20.9	23.9	26.9	29.9	32.8	35.8	38.8	+126°	-26°

Average Air Temperature Correction in Feet

For temperatures above 50° F. the values are to be added
For temperatures below 50° F. the values are to be subtracted

Average air temp. °F.		Difference of readings in feet											Average air temp. °F.		
		280	300	320	340	360	380	400	420	440	460	480			500
+50°	+50°	0	0	0	0	0	0	0	0	0	0	0	0	+50°	
+48°	+52°	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9	2.0	+52°	+48°
+46°	+54°	2.2	2.4	2.5	2.7	2.8	3.0	3.1	3.3	3.5	3.6	3.8	3.9	+54°	+46°
+44°	+56°	3.3	3.5	3.8	4.0	4.2	4.5	4.7	4.9	5.2	5.4	5.7	5.9	+56°	+44°
+42°	+58°	4.4	4.7	5.0	5.3	5.7	6.0	6.3	6.6	6.9	7.2	7.5	7.9	+58°	+42°
+40°	+60°	5.5	5.9	6.3	6.7	7.1	7.5	7.9	8.2	8.6	9.0	9.4	9.8	+60°	+40°
+38°	+62°	6.6	7.1	7.5	8.0	8.5	9.0	9.4	9.9	10.4	10.8	11.3	11.8	+62°	+38°
+36°	+64°	7.7	8.2	8.8	9.3	9.9	10.4	11.0	11.5	12.1	12.6	13.2	13.7	+64°	+36°
+34°	+66°	8.8	9.4	10.1	10.7	11.3	11.9	12.6	13.2	13.8	14.5	15.1	15.7	+66°	+34°
+32°	+68°	9.9	10.6	11.3	12.0	12.7	13.4	14.1	14.8	15.6	16.3	17.0	17.7	+68°	+32°
+30°	+70°	11.0	11.8	12.6	13.4	14.1	14.9	15.7	16.5	17.2	18.1	18.9	19.6	+70°	+30°
+28°	+72°	12.1	13.0	13.8	14.7	15.6	16.4	17.3	18.2	19.0	19.9	20.7	21.6	+72°	+28°
+26°	+74°	13.2	14.1	15.1	16.0	17.0	17.9	18.9	19.8	20.7	21.7	22.6	23.6	+74°	+26°
+24°	+76°	14.3	15.3	16.3	17.4	18.4	19.4	20.4	21.4	22.5	23.5	24.5	25.5	+76°	+24°
+22°	+78°	15.4	16.5	17.6	18.7	19.8	20.9	22.0	23.1	24.2	25.3	26.4	27.5	+78°	+22°
+20°	+80°	16.5	17.7	18.8	20.0	21.2	22.4	23.6	24.7	25.9	27.1	28.3	29.5	+80°	+20°

+18°	+82°	17.6	18.8	20.1	21.4	22.6	23.9	25.1	26.4	27.7	28.9	30.2	31.4	+82°	+18°
+16°	+84°	18.7	20.0	21.4	22.7	24.0	25.4	26.7	28.0	29.4	30.7	32.1	33.4	+84°	+16°
+14°	+86°	19.8	21.2	22.6	24.0	25.5	26.9	28.3	29.7	31.1	32.5	33.9	35.3	+86°	+14°
+12°	+88°	20.9	22.4	23.9	25.4	26.9	28.4	29.9	31.3	32.8	34.3	35.8	37.3	+88°	+12°
+10°	+90°	22.0	23.6	25.1	26.7	28.3	29.9	31.4	33.0	34.6	36.1	37.7	39.3	+90°	+10°
+8°	+92°	23.1	24.7	26.4	28.0	29.7	31.3	33.0	34.6	36.3	37.9	39.6	41.2	+92°	+8°
+6°	+94°	24.2	25.8	27.7	29.4	31.1	32.8	34.6	36.3	38.0	39.8	41.5	43.2	+94°	+6°
+4°	+96°	25.3	27.1	28.9	30.7	32.5	34.3	36.1	37.9	39.8	41.6	43.4	45.2	+96°	+4°
+2°	+98°	26.4	28.3	30.2	32.1	33.9	35.8	37.7	39.6	41.5	43.4	45.2	47.1	+98°	+2°
0°	+100°	27.5	29.5	31.4	33.4	35.4	37.3	39.3	41.2	43.2	45.2	47.1	49.1	+100°	0°
-2°	+102°	28.6	30.6	32.7	34.7	36.8	38.8	40.9	42.9	44.9	47.0	49.0	51.1	+102°	-2°
-4°	+104°	29.7	31.8	33.9	36.1	38.2	40.3	42.4	44.5	46.7	48.8	50.9	53.0	+104°	-4°
-6°	+106°	30.8	33.0	35.2	37.4	39.6	41.8	44.0	46.2	48.4	50.6	52.8	55.0	+106°	-6°
-8°	+108°	31.9	34.2	36.5	38.7	41.0	43.3	45.6	47.8	50.1	52.4	54.7	57.0	+108°	-8°
-10°	+110°	33.0	35.4	37.7	40.1	42.4	44.8	47.1	49.5	51.8	54.2	56.6	58.9	+110°	-10°
-12°	+112°	34.1	36.5	39.0	41.4	43.8	46.3	48.7	51.1	53.6	56.0	58.4	60.9	+112°	-12°
-14°	+114°	35.2	37.7	40.2	42.7	45.3	47.8	50.3	52.8	55.3	57.8	60.3	62.8	+114°	-14°
-16°	+116°	36.3	38.9	41.5	44.1	46.7	49.3	51.9	54.4	57.0	59.6	62.2	64.8	+116°	-16°
-18°	+118°	37.4	40.1	42.7	45.4	48.1	50.8	53.4	56.1	58.8	61.4	64.1	66.8	+118°	-18°
-20°	+120°	38.5	41.2	44.0	46.7	49.5	52.2	55.0	57.7	60.5	63.2	66.0	68.7	+120°	-20°
-22°	+122°	39.6	42.4	45.2	48.1	50.9	53.7	56.6	59.4	62.2	65.1	67.9	70.7	+122°	-22°
-24°	+124°	40.7	43.6	46.5	49.4	52.3	55.2	58.1	61.0	64.0	66.9	69.8	72.7	+124°	-24°
-26°	+126°	41.8	44.8	47.8	50.8	53.7	56.7	59.7	62.7	65.7	68.7	71.7	74.6	+126°	-26°

Average Air Temperature Correction in Feet

For temperatures above 50° F. the values are to be added
For temperatures below 50° F. the values are to be subtracted

Average air temp. °F.		Difference of readings in feet														Average air temp. °F.	
		500	520	540	560	580	600	620	640	660	680	700	720	740	760		
	+50°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	+50°	
+48°	+52°	2.0	2.0	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.7	2.8	2.9	3.0	+52°	+48°
+46°	+54°	3.9	4.1	4.2	4.4	4.6	4.7	4.9	5.0	5.2	5.3	5.5	5.7	5.8	6.0	+54°	+46°
+44°	+56°	5.6	6.1	6.4	6.6	6.8	7.1	7.3	7.5	7.8	8.0	8.2	8.5	8.7	9.0	+56°	+44°
+42°	+58°	7.0	8.2	8.5	8.8	9.1	9.4	9.7	10.1	10.4	10.7	11.0	11.3	11.6	11.9	+58°	+42°
+40°	+60°	8.8	10.2	10.6	11.0	11.4	11.8	12.2	12.6	13.0	13.4	13.7	14.1	14.5	14.8	+60°	+40°
+38°	+62°	11.8	12.3	12.7	13.2	13.7	14.1	14.6	15.1	15.5	16.0	16.5	17.0	17.4	17.9	+62°	+38°
+36°	+64°	13.7	14.3	14.8	15.4	15.9	16.5	17.0	17.6	18.1	18.7	19.2	19.8	20.3	20.8	+64°	+36°
+34°	+66°	15.7	16.3	17.0	17.6	18.2	18.9	19.5	20.1	20.7	21.4	22.0	22.6	23.3	23.9	+66°	+34°
+32°	+68°	17.7	18.4	19.1	19.8	20.5	21.2	21.9	22.6	23.3	24.0	24.7	25.5	26.2	26.9	+68°	+32°
+30°	+70°	19.6	20.4	21.2	22.0	22.8	23.6	24.4	25.1	25.9	26.7	27.5	28.3	29.1	29.9	+70°	+30°
+28°	+72°	21.6	22.5	23.3	24.2	25.1	25.9	26.8	27.7	28.5	29.4	30.2	31.1	32.0	32.8	+72°	+28°
+26°	+74°	23.6	24.5	25.5	26.4	27.3	28.3	29.2	30.2	31.1	32.1	33.0	33.9	34.9	35.8	+74°	+26°
+24°	+76°	25.5	26.6	27.6	28.6	29.6	30.6	31.7	32.7	33.7	34.7	35.7	36.8	37.8	38.8	+76°	+24°
+22°	+78°	27.5	28.6	29.7	30.8	31.9	33.0	34.1	35.2	36.3	37.4	38.5	39.6	40.7	41.8	+78°	+22°
+20°	+80°	29.5	30.7	31.8	33.0	34.2	35.4	36.6	37.7	38.9	40.1	41.2	42.4	43.6	44.8	+80°	+20°

+18°	+82°	31.4	32.7	33.0	35.2	36.5	37.7	39.0	40.2	41.5	42.7	44.0	45.3	46.5	47.8	+82°	+18°
+16°	+84°	33.4	34.7	35.1	37.4	38.7	40.1	41.4	42.7	44.1	45.4	46.7	48.1	49.4	50.8	+84°	+16°
+14°	+86°	35.3	36.8	38.2	40.0	41.0	42.4	43.8	45.2	46.7	48.1	49.5	50.9	52.3	53.7	+86°	+14°
+12°	+88°	37.3	38.8	40.3	41.8	43.3	44.8	46.2	47.8	49.3	50.7	52.2	53.7	55.2	56.7	+88°	+12°
+10°	+90°	39.3	40.9	42.4	44.0	45.6	47.1	48.7	50.3	51.8	53.4	55.0	56.6	58.1	59.7	+90°	+10°
+8°	+92°	41.2	42.9	44.5	46.2	47.8	49.5	51.1	52.8	54.4	56.1	57.7	59.4	61.0	62.7	+92°	+8°
+6°	+94°	43.2	44.9	46.7	48.4	50.1	51.9	53.6	55.3	57.0	58.8	60.5	62.2	64.0	65.7	+94°	+6°
+4°	+96°	45.2	47.0	48.8	50.6	52.4	54.2	56.0	57.8	59.6	61.4	63.2	65.1	66.9	68.7	+96°	+4°
+2°	+98°	47.1	49.0	50.9	52.8	54.7	56.6	58.4	60.3	62.2	64.1	66.0	67.9	69.8	71.6	+98°	+2°
0°	+100°	49.1	51.1	53.0	55.0	57.0	58.9	60.9	62.8	64.8	66.8	68.7	70.7	72.7	74.6	+100°	0°
-2°	+102°	51.1	53.1	55.1	57.2	59.2	61.3	63.3	65.4	67.4	69.4	71.5	73.5	75.6	77.6	+102°	-2°
-4°	+104°	53.0	55.2	57.3	59.4	61.5	63.6	65.7	67.8	70.0	72.1	74.2	76.4	78.5	80.6	+104°	-4°
-6°	+106°	55.0	57.2	59.4	61.6	63.8	66.0	68.2	70.4	72.6	74.8	77.0	79.2	81.4	83.6	+106°	-6°
-8°	+108°	57.0	59.2	61.5	63.8	66.1	68.3	70.6	72.9	75.2	77.5	79.7	82.0	84.3	86.6	+108°	-8°
-10°	+110°	58.9	61.3	63.6	66.0	68.3	70.7	73.1	75.4	77.8	80.1	82.5	84.8	87.2	89.6	+110°	-10°
-12°	+112°	60.9	63.3	65.8	68.2	70.6	73.1	75.5	77.9	80.4	82.8	85.2	87.7	90.1	92.5	+112°	-12°
-14°	+114°	62.8	65.4	67.9	70.4	72.9	75.4	77.9	80.4	83.0	85.5	88.0	90.5	93.0	95.5	+114°	-14°
-16°	+116°	64.8	67.4	70.0	72.6	75.2	77.8	80.4	83.0	85.6	88.1	90.7	93.3	95.9	98.5	+116°	-16°
-18°	+118°	66.8	69.5	72.1	74.8	77.5	80.1	82.8	85.5	88.1	90.8	93.5	96.2	98.8	101.5	+118°	-18°
-20°	+120°	68.7	71.5	74.2	77.0	79.7	82.5	85.2	88.0	90.7	93.5	96.2	99.0	101.7	104.5	+120°	-20°
-22°	+122°	70.7	73.6	76.4	79.2	82.0	84.8	87.7	90.5	93.3	96.2	99.0	101.8	104.7	107.5	+122°	-22°
-24°	+124°	72.7	75.6	78.5	81.4	84.3	87.2	90.1	93.0	95.9	98.8	101.7	104.7	107.6	110.5	+124°	-24°
-26°	+126°	74.6	77.6	80.6	83.6	86.6	89.6	92.6	95.5	98.5	101.5	104.5	107.5	110.5	113.5	+126°	-26°

Average Air Temperature Correction in Feet

For temperatures above 50° F. the values are to be added
 For temperatures below 50° F. the values are to be subtracted

Average air temp. °F.		Difference of readings in feet												Average air temp. °F.	
		780	800	820	840	860	880	900	920	940	960	980	1000		
	+50°	0	0	0	0	0	0	0	0	0	0	0	0	+50°	
+48°	+52°	3.1	3.1	3.2	3.3	3.4	3.5	3.5	3.6	3.7	3.8	3.8	3.9	+52°	+48°
+46°	+51°	6.1	6.3	6.4	6.6	6.8	6.9	7.1	7.2	7.4	7.5	7.7	7.9	+51°	+46°
+44°	+56°	9.2	9.4	9.7	9.9	10.1	10.4	10.6	10.8	11.1	11.3	11.6	11.8	+56°	+44°
+42°	+58°	12.3	12.6	12.9	13.2	13.5	13.8	14.1	14.5	14.8	15.1	15.4	15.7	+58°	+42°
+40°	+60°	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.5	18.8	19.2	19.6	+60°	+40°
+38°	+62°	18.4	18.8	19.3	19.8	20.3	20.7	21.2	21.7	22.1	22.6	23.1	23.6	+62°	+38°
+36°	+64°	21.4	22.0	22.5	23.1	23.6	24.2	24.7	25.3	25.8	26.4	26.9	27.5	+64°	+36°
+34°	+66°	24.5	25.1	25.8	26.4	27.0	27.6	28.3	28.9	29.5	30.2	30.8	31.4	+66°	+34°
+32°	+68°	27.6	28.3	29.0	29.7	30.4	31.1	31.8	32.5	33.2	33.9	34.6	35.4	+68°	+32°
+30°	+70°	30.6	31.4	32.2	33.0	33.8	34.6	35.4	36.1	36.9	37.7	38.5	39.3	+70°	+30°
+28°	+72°	33.7	34.6	35.4	36.3	37.2	38.0	38.9	39.8	40.6	41.5	42.3	43.2	+72°	+28°
+26°	+74°	36.8	37.7	38.7	39.6	40.5	41.5	42.4	43.4	44.3	45.3	46.2	47.1	+74°	+26°
+24°	+76°	39.8	40.9	41.9	42.9	43.9	44.9	46.0	47.0	48.0	49.0	50.0	51.1	+76°	+24°
+22°	+78°	42.9	44.0	45.1	46.2	47.3	48.4	49.5	50.6	51.7	52.8	53.9	55.6	+78°	+22°
+20°	+80°	46.0	47.1	48.3	49.5	50.7	51.8	53.0	54.2	55.4	56.6	57.7	58.9	+80°	+20°

+18°	+82°	49.0	50.3	51.5	52.8	54.1	55.3	56.6	57.8	59.1	60.3	61.6	62.8	+82°	+18°
+16°	+84°	52.1	53.4	54.8	56.1	57.4	58.8	60.1	61.4	62.8	64.1	65.4	66.8	+84°	+16°
+14°	+85°	55.1	56.6	58.0	59.4	60.8	62.2	63.6	65.0	66.5	67.9	69.3	70.7	+86°	+14°
+12°	+88°	58.2	59.7	61.2	62.7	64.2	65.7	67.2	68.7	70.2	71.6	73.1	74.6	+88°	+12°
+10°	+90°	61.3	62.8	64.4	66.0	67.6	69.1	70.7	72.3	73.8	75.4	77.0	78.6	+90°	+10°
+8°	+92°	64.3	66.0	67.6	69.3	70.9	72.6	74.2	75.9	77.5	79.2	80.8	82.5	+92°	+8°
+6°	+94°	67.4	69.1	70.9	72.6	74.3	76.0	77.8	79.5	81.2	83.0	84.7	86.4	+94°	+6°
+4°	+96°	70.5	72.3	74.1	75.9	77.7	79.5	81.3	83.1	84.9	86.7	88.5	90.3	+96°	+4°
+2°	+98°	73.5	75.4	77.3	79.2	81.1	83.0	84.8	86.7	88.6	90.5	92.4	94.3	+98°	+2°
0°	+100°	76.6	78.6	80.5	82.5	84.5	86.4	88.4	90.3	92.3	94.3	96.2	98.2	+100°	0°
-2°	+102°	79.7	81.7	83.7	85.8	87.8	89.9	91.9	94.0	96.0	98.0	100.1	102.1	+102°	-2°
-4°	+104°	82.7	84.8	87.0	89.1	91.2	93.3	95.5	97.6	99.7	101.8	103.9	106.1	+104°	-4°
-6°	+106°	85.8	88.0	90.2	92.4	94.6	96.8	99.0	101.2	103.4	105.6	107.8	110.0	+106°	-6°
-8°	+108°	88.8	91.1	93.4	95.7	98.0	100.2	102.5	104.8	107.1	109.4	111.6	113.9	+108°	-8°
-10°	+110°	91.9	94.3	96.6	99.0	101.3	103.7	106.1	108.4	110.8	113.1	115.5	117.8	+110°	-10°
-12°	+112°	95.0	97.4	99.9	102.3	104.7	107.2	109.6	112.0	114.5	116.9	119.3	121.8	+112°	-12°
-14°	+114°	98.0	100.6	103.1	105.6	108.1	110.6	113.1	115.6	118.2	120.7	123.2	125.7	+114°	-14°
-16°	+116°	101.1	103.7	106.3	108.9	111.5	114.1	116.7	119.3	121.9	124.4	127.0	129.6	+116°	-16°
-18°	+118°	104.2	106.8	109.5	112.2	114.9	117.5	120.2	122.9	125.5	128.2	130.9	133.6	+118°	-18°
-20°	+120°	107.2	110.0	112.7	115.5	118.2	121.0	123.7	126.5	129.2	132.0	134.7	137.5	+120°	-20°
-22°	+122°	110.3	113.1	116.0	118.8	121.6	124.4	127.3	130.1	132.9	135.8	138.6	141.4	+122°	-22°
-24°	+124°	113.4	116.3	119.2	122.1	125.0	127.9	130.8	133.7	136.6	139.5	142.4	145.3	+124°	-24°
-26°	+126°	116.4	119.4	122.4	125.4	128.4	131.4	134.4	137.3	140.3	143.3	146.3	149.3	+126°	-26°